


ROMULUS SLIM

Bendable profile with diffuser
 Profilé cintrable avec diffuseur

A39106

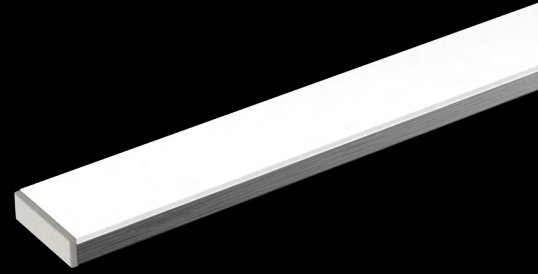

Puissance & largeur max Strip Led Power & width max Strip Led
 24 w/m - 10 mm


Dimensions Dimensions
 16 x 5.5 mm

Longueur maximale Max.length
 3000 mm

Leds/m minimum pour une ligne sans point led Minimum Leds/m for Dot-free (Opal cover)
 ≥ 350 leds/m

Fil incandescent Glow wire test
 850°C

Température d'utilisation Ambient temp.
 - 10°C / + 40°C

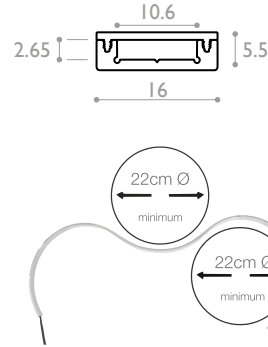

A39106.DW.IP20.04.OP

Type of led

Dim To Warm	A4126	DTW
Dynamic White	A4102	DW
Dynamic White COB	A4137	COBDW
Full Spectrum	A4197	SUN
Pixel RGB	A4120	RGBX
Pixel RGBW	A4124	RGBWX
Pixel White	A4119	WX
Pure CRI	A4199	PCRI
Regular	A4109	REG
Regular Mini Cut	A4159	RMC
RGB	A4106	RGB
Ultra CRI	A4101	UCRI
Ultra CRI COB 10	A4130	COB10
Ultra CRI COB 8	A4130	COB8
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Wine Protect	A4104	WINE

IP Rating


IP20	IP20
IP54 (Wet indoor)	IP54
IP65	IP65

Finishes

Aluminium anodised silver	00
Aluminium anodised black	04

Cover & Optic

Opal PC	60%	OP
Frosted PC	70%	FR
Night & Day PC	25%	ND

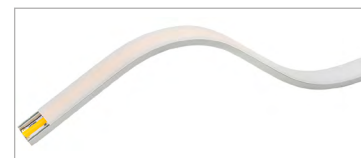

Bendable profile



A39106.CLP
 Plastic fixing clip



A39106.BMA
 Bending machine