


SOLO

Recessed profile in floor with IP65 diffusor
Profil encastré de sol avec diffuseur IP65

A39144

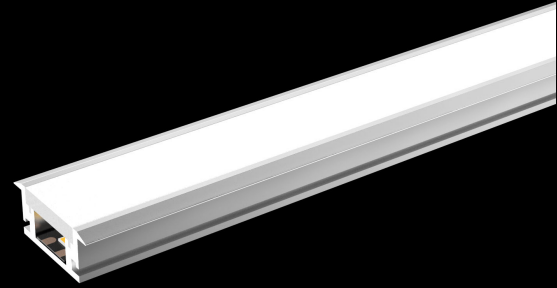


Puissance maxi Power max
24 w/m

Dimensions Dimensions
26 x 11 mm (gorge 21mm)

Longueur maximale Max.length
3000 mm

Homologation Standards
IK10

Température d'utilisation Ambient temp.
- 10°C / + 40°C



A39144.C9.IP20.00.OP.DALI

Type of led

Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGB+W	A4107
RGB+2W	A4117
High Efficiency	A4111
Ultra Efficiency	A4116
Xicato Artist	A4122

C99
CR
DW
C9
RGB
RGBW
RGB2W
HE
UE
XLT

IP Rating

IP20
IP54
IP65H

IP20
IP54
IP65

Finishes

Aluminium anodised silver
Aluminium anodised black

00
04

Cover & Optic

Opal

OP

Dimming

No dimming
Dali
Dmx
Dimming & to 10Vdc
Phase Dimming Digital

HF
DALI
DMX
D10
PHD



A39144.00



A39144.OPL
Diffuseur opal ip65