

# OCTO

Profile with reflector  
Profil avec reflecteur

A3926




**Puissance maxi Power max**  
80 w/m

**Dimensions Dimensions**  
80 x 90 mm

**Longueur maximale Max.length**  
3000 mm

**Température d'utilisation Ambient temp.**  
- 10°C / + 40°C

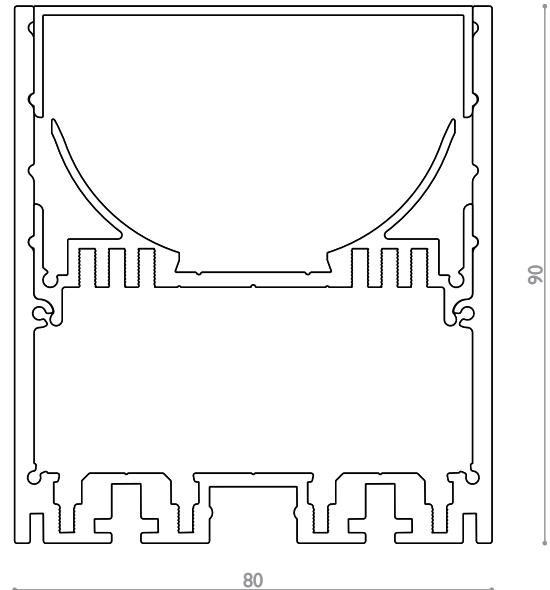

**A3926.C9.IP20.00.OP.DALI**

## Type of led

CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Standard	A4108	ST
CRI92	A4109	C9
RGB	A4106	RGB
RGBW	A4107	RGBW
RGB2W	A4117	RGB2W
High Efficacy	A4111	HE
Ultra Efficacy	A4116	UE

## IP Rating

IP20	IP20
IP54	IP54
IP65H	IP63

## Finishes

Aluminium anodised silver	00
Aluminium anodised black	04
White ral9016 sat	16

## Cover & Optic

Opal	OP
Frost	FR

## Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc	D10
Phase Dimming Digital	PHD

