

SOLO OPTI

Orientable profile IK10
Profile orientable IK10

A393I




Puissance & largeur max Strip Led Power & width max Strip Led
20 w/m - 13x12 mm

Dimensions Dimensions
28 x 28 mm

Longueur maximale Max.length
3010 mm

Température d'utilisation Ambient temp.
- 20°C / + 50°C

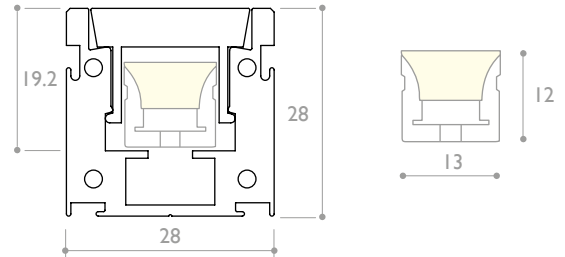

A393I.A4432W.IP67.00.OP

Type of led

Neo Top Distance WHITE	A4450.W
Neo Top Pixel RGB	A4419.RGBX
Neo Top Pixel WHITE	A4419.WX
Neo Top RGB	A4401.RGB
Neo Top RGBW	A4401.RGBW
Neo Top Ultra Efficiency DW	A4432.DW
Neo Top Ultra Efficiency WHITE	A4432.W

IP Rating

IP20	IP20
IP54 (Wet indoor)	IP54
IP65	IP65
IP67	IP67


Finishes

Aluminium anodised silver	00
Painting RAL (On request)	Rxxxx

Cover & Optic PMMA (Max. length 6m)

Opal PMMA	55%	OP
Clear PMMA	92%	CL
Clear 20° PMMA	79%	CL20

Modes de montage

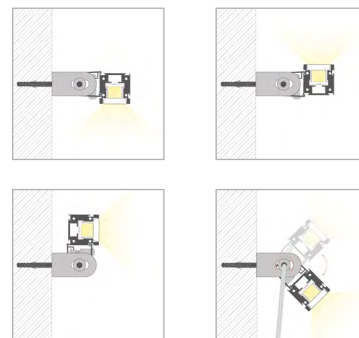

Accessoires



A393I.SUPMUR
Support mural
longueur 45mm, 60mm,
75mm, 90mm, 105mm,
155mm