


# ANGEL

Corner profile  
Profil d'angle

A3949



<b>Puissance maxi</b>	<b>Power max</b>
	35 w/m
<b>Dimensions</b>	<b>Dimensions</b>
	30 x 33 mm (42 x 36 mm)
<b>Longueur maximale</b>	<b>Max.length</b>
	3000 mm
<b>Température d'utilisation</b>	<b>Ambiant temp.</b>
	- 10°C / + 40°C

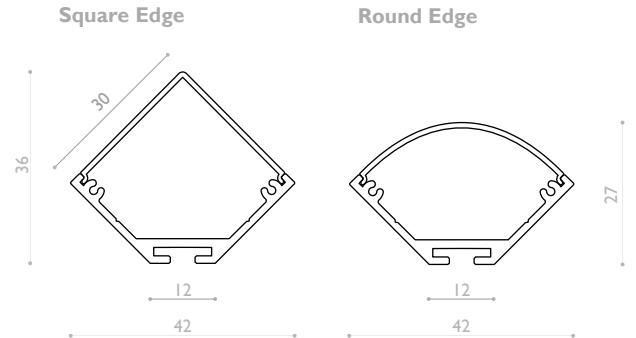

## A3949.C9.IP20.00.OP.S.DALI

### Type of led

Pure CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Regular	A4109	C9
RGB	A4106	RGB
RGB+W	A4107	RGBW
RGB+2W	A4117	RGB2W
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96

### IP Rating

IP20	IP20
IP54	IP54
IP65H	IP65

### Finishes

Aluminium anodised silver	00
Aluminium anodised black	04
White ral9016 sat	16




### Cover & Optic

Opal Square	OPS
Opal Round	OPR

### Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming 0/1 - 10Vdc	D10
Phase Dimming (TRIAC)	PHD

### Round Edge



A3946.OPS  
Diffusor opal Square



A3946.ECA  
Encap



A3946.KSU  
Suspension kit