


ANGEL MINI

Corner profile
Profilé d'angle

A3951

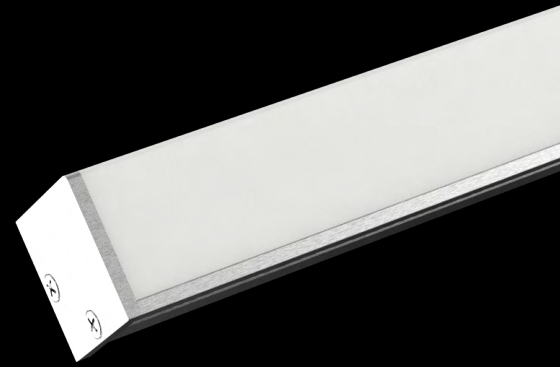


Puissance & largeur max Strip Led Power & width max Strip Led
30 w/m - 10 mm

Dimensions Dimensions
20 x 20 mm

Longueur maximale Max.length
3000 mm

Leds/m minimum pour une ligne sans point led Minimum Leds/m for Dot-free (Opal cover)
≥ 110 leds/m

Température d'utilisation Ambient temp.
- 10°C / + 40°C

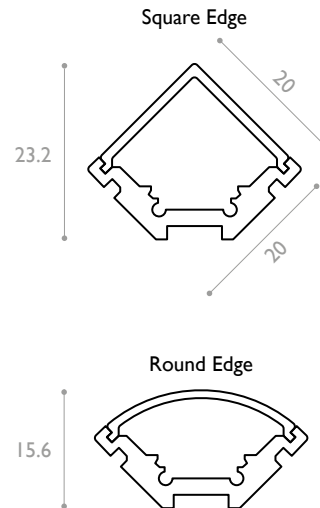

A3951.RGB.IP20.00.OPR

Type of led

Dim To Warm	A4126	DTW
Dynamic White	A4102	DW
Dynamic White COB	A4137	COBDW
Full Spectrum	A4197	SUN
Pixel RGB	A4120	RGBX
Pixel RGBW	A4124	RGBWX
Pixel White	A4119	WX
Pure CRI	A4199	PCRI
Regular	A4109	REG
Regular Mini Cut	A4159	RMC
RGB	A4106	RGB
Ultra CRI	A4101	UCRI
Ultra CRI COB 10	A4130	COB10
Ultra CRI COB 8	A4130	COB8
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Wine Protect	A4104	WINE

IP Rating

IP20	IP20
IP54 (Wet indoor)	IP54

Finishes

Aluminium anodised silver	00
Aluminium anodised black	04
Painting RAL (On request)	Rxxxx

Cover & Optic

Opal Round PMMA 180°	69%	OPR
Opal Square PMMA 180°	69%	OPS



A3951.CLI
Fixed clip


ANGEL MINI

Corner profile
Profilé d'angle

A395I



OPAL SQUARE

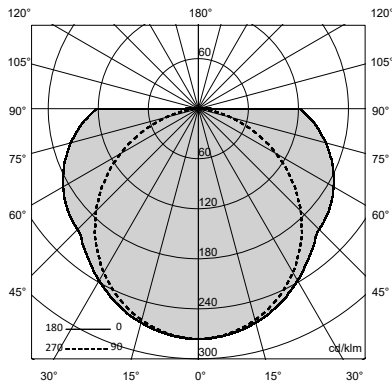

OPAL ROUND

