



FLEX

Flexible profile for cove lighting
 Profil aluminium flexible pour gorge lumineuse

A3953

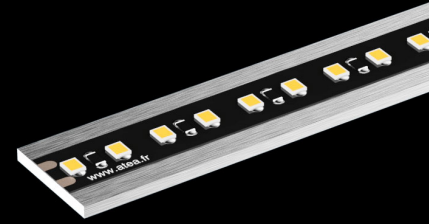

Puissance maxi Power max
 15 w/m



Dimensions Dimensions
 16 x 2 mm



Longueur maximale Max.length
 2000 mm

Température d'utilisation Ambient temp.
 - 10°C / + 40°C

A3953.COB.IP20.00.DALI

Type of led

UltraCRI COB	A4130
Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGB+W	A4107
RGB+2W	A4117

COB
 C99
 CR
 DW
 C9
 RGB
 RGBW
 RGB2W

IP Rating

IP20
 IP54
 IP65H

IP20
 IP54
 IP65

Finishes

Aluminium anodised silver
 Aluminium anodised black

00
 04

Dimming

No dimming
 Dali
 Dmx
 Dimming & to 10Vdc
 Phase Dimming Digital

HF
 DALI
 DMX
 D10
 PHD



A3953.04
 Profile Black



A3953.CLP
 Clips

ATEA

