


COBET TILT

Recessed profile with asymmetric optic
 Profilé encastré avec optique asymétrique

A3954

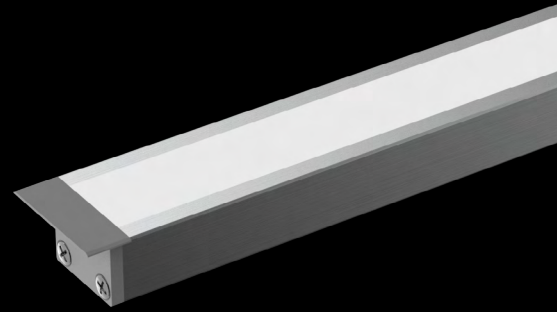

Puissance & largeur max Strip Led Power & width max Strip Led
 24 w/m - 10 mm


Dimensions Dimensions
 15 x 12 mm

Longueur maximale Max.length
 3000 mm


Leds/m minimum pour une ligne sans point led Minimum Leds/m for Dot-free (Opal cover)
 ≥ 120 leds/m

Température d'utilisation Ambient temp.
 - 10°C / + 40°C

Asymetric 20x62°



Opal/Frosted/Night & Day




A3954.DW.IP20.00.FR

Type of led		
Dim To Warm	A4126	DTW
Dynamic White	A4102	DW
Dynamic White COB	A4137	COBDW
Full Spectrum	A4197	SUN
Pixel RGB	A4120	RGBX
Pixel RGBW	A4124	RGBWX
Pixel White	A4119	WX
Pure CRI	A4199	PCRI
Regular	A4109	REG
Regular Mini Cut	A4159	RMC
RGB	A4106	RGB
Ultra CRI	A4101	UCRI
Ultra CRI COB 10	A4130	COB10
Ultra CRI COB 8	A4130	COB8
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Wine Protect	A4104	WINE
IP Rating		
IP20		IP20
IP54 (Wet indoor)		IP54
IP65		IP65
Finishes		
Aluminium anodised silver		00
Aluminium anodised black		04
Cover & Optic		
Frosted Asym 20x62°	85%	AS2062
Opal PMMA	69%	OP
Frosted PMMA	85%	FR
Night & Day PMMA	22%	ND



A3953.MAGT
 3M magnetic tape




Installation


COBET TILT

Recessed profile with asymmetric optic
Profilé encastré avec optique asymétrique


A3954

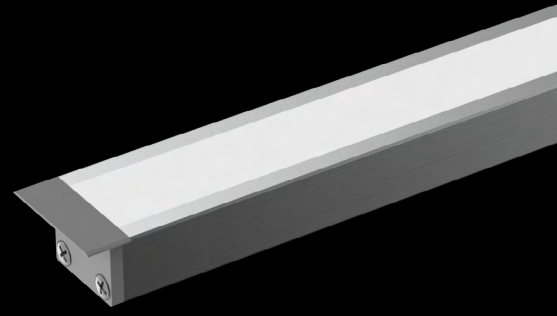


OPAL

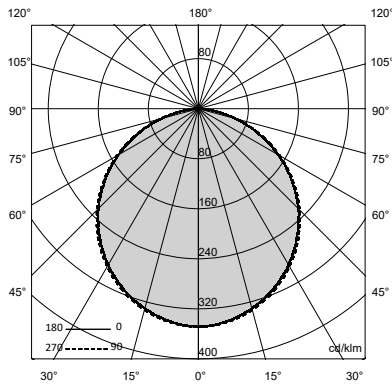

FROST

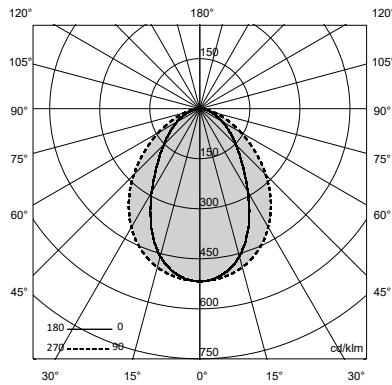

FROST ASYM 20x62°

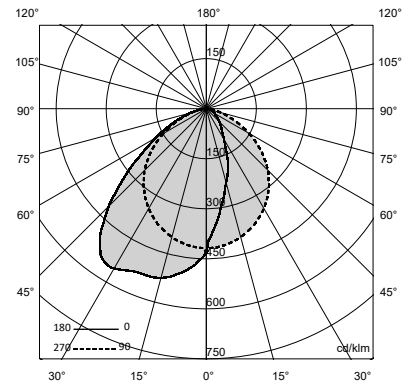

Night&Day

