

CAMPUS HIGH MICROLOUVER

Profile with optic and micro louver
 Profilé aluminium avec optique et grille basse luminance

A3961L




Puissance & largeur max Strip Led Power & width max Strip Led
 30 w/m - 12 mm

Dimensions Dimensions
 18 x 20 mm

Longueur maximale Max.length
 1250 mm

Leds/m minimum pour une ligne sans point led Minimum Leds/m for Dot-free (Opal cover)
 ≥ 180 leds/m

Température d'utilisation Ambient temp.
 - 10°C / + 40°C

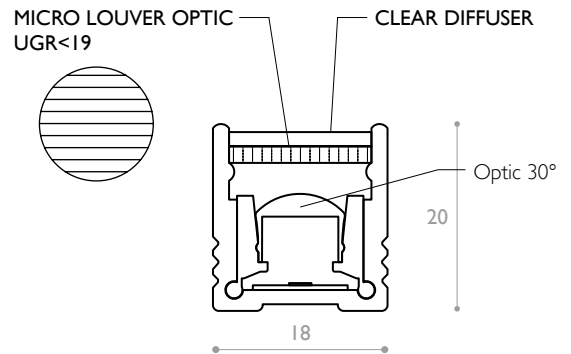

Type of led

Dim To Warm	A4126	DTW
Dynamic White	A4102	DW
Dynamic White COB	A4137	COBDW
Full Spectrum	A4197	SUN
Pixel RGB	A4120	RGBX
Pixel RGBW	A4124	RGBWX
Pixel Triple White	A4123	3WX
Pixel White	A4119	WX
Pure CRI	A4199	PCRI
Regular	A4109	REG
Regular Mini Cut	A4159	RMC
RGB	A4106	RGB
RGB+W	A4107	RGBW
RGB+2W	A4117	RGB2W
Ultra CRI	A4101	UCRI
Ultra CRI COB 10	A4130	COB10
Ultra CRI COB 8	A4130	COB8
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Wine Protect	A4104	WINE

IP Rating

IP20	IP20
IP54 (Wet indoor)	IP54

Finishes


Aluminium anodised silver	00
Aluminium anodised black	04
Painting RAL (On request)	Rxxxx

Cover & Optic

MicroLouver + Frost 30° PMMA 39% ML30

A3961L.WX.IP20.00.ML30

FROST 30° + MICRO LOUVER

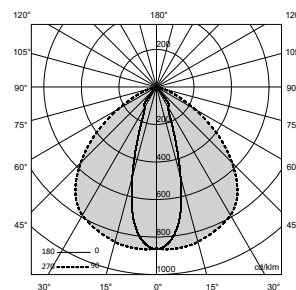

A3960.CAD
Adjustable clip



A3960.CLS
Stainless steel clip



A3960.JUN
Junction clip



A3960.C45
45° tilt clip



A3960.MAG
Fixing magnet