

# COBE H MICROLOUVER

Profile with optic and micro louver  
 Profilé aluminium avec optique et grille basse luminance

A3962L



**Puissance & largeur max Strip Led Power & width max Strip Led**  
 30 w/m - 12 mm

**Dimensions Dimensions**  
 18 x 30 mm


**Longueur maximale Max.length**  
 1250 mm

**Leds/m minimum pour une ligne sans point led Minimum Leds/m for Dot-free (Opal cover)**  
 ≥ 180 leds/m

**Température d'utilisation Ambient temp.**  
 - 10°C / + 40°C



**MICRO LOUVER OPTIC CLEAR DIFFUSER**  
 UGR<19

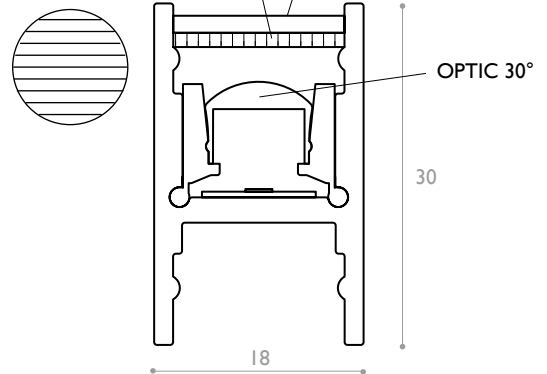

**A3962L.WX.IP20.00.ML30**

**Type of led**

Dim To Warm	A4126	DTW
Dynamic White	A4102	DW
Dynamic White COB	A4137	COBDW
Full Spectrum	A4197	SUN
Pixel RGB	A4120	RGBX
Pixel RGBW	A4124	RGBWX
Pixel Triple White	A4123	3WX
Pixel White	A4119	WX
Pure CRI	A4199	PCRI
Regular	A4109	REG
Regular Mini Cut	A4159	RMC
RGB	A4106	RGB
RGB+W	A4107	RGBW
RGB+2W	A4117	RGB2W
Ultra CRI	A4101	UCRI
Ultra CRI COB 10	A4130	COB10
Ultra CRI COB 8	A4130	COB8
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Wine Protect	A4104	WINE

**IP Rating**

IP20	IP20
IP54 (Wet indoor)	IP54


**Finishes**

Aluminium anodised silver	00
Aluminium anodised black	04
Painting RAL (On request)	Rxxxx

**Cover & Optic**

MicroLouver + Frost 30° PMMA 39% ML30

**FROST 30° + MICRO LOUVER**

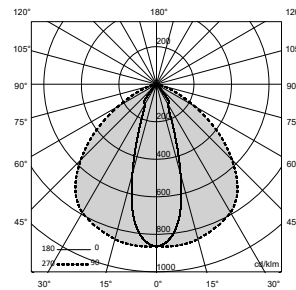

A3962.CLI  
Fixed clip



A3962.SUS  
Suspension kit