


# CAMPUS TILT

Profile with asymmetric optic  
 Profilé avec optique asymétrique

A3969

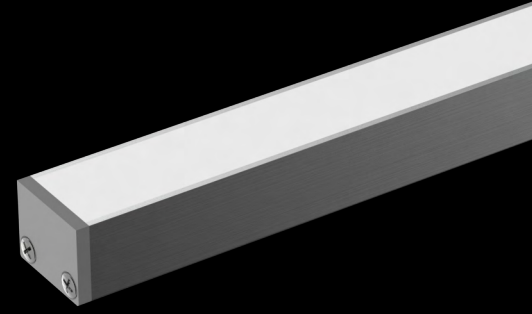

**Puissance & largeur max Strip Led Power & width max Strip Led**  
 24 w/m - 10 mm


**Dimensions Dimensions**  
 15 x 12 mm

**Longueur maximale Max.length**  
 3000 mm


**Leds/m minimum pour une ligne sans point led Minimum Leds/m for Dot-free (Opal cover)**  
 ≥ 130 leds/m

**Température d'utilisation Ambient temp.**  
 - 10°C / + 40°C

Asymmetric 20x62°



Opal/Frosted/Night & Day

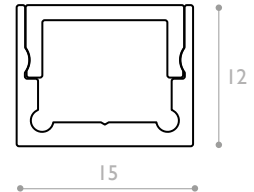

**A3969.DW.IP20.00.AS2062**

**Type of led**

Dim To Warm	A4126	DTW
Dynamic White	A4102	DW
Dynamic White COB	A4137	COBDW
Full Spectrum	A4197	SUN
Pixel RGB	A4120	RGBX
Pixel RGBW	A4124	RGBWX
Pixel White	A4119	WX
Pure CRI	A4199	PCRI
Regular	A4109	REG
Regular Mini Cut	A4159	RMC
RGB	A4106	RGB
Ultra CRI	A4101	UCRI
Ultra CRI Cob 10	A4130	COB10
Ultra CRI Cob 8	A4130	COB8
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Wine Protect	A4104	WINE

**IP Rating**

IP20	IP20
IP54 (Wet indoor)	IP54
IP65	IP65

**Finishes**


Aluminium anodised silver	00
Aluminium anodised black	04
Painting RAL (On request)	Rxxxx

**Cover & Optic**

Frosted Asym 20x62° PMMA	85%	AS2062
Opal PMMA	69%	OP
Frosted PMMA	85%	FR
Night & Day PMMA	22%	ND



A3953.MAGT  
 3M magnetic tape




Installation


# CAMPUS TILT

Profile with asymmetric optic  
Profilé avec optique asymétrique


A3969

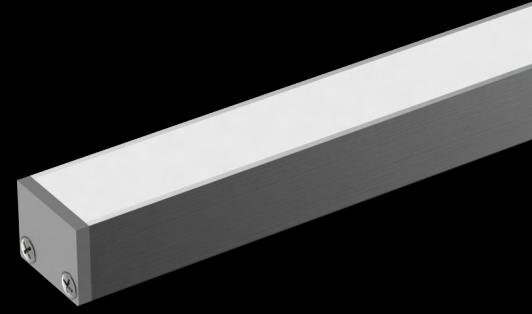


OPAL

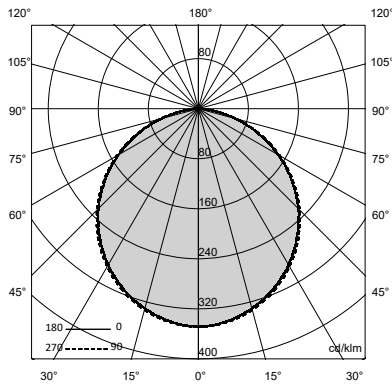

FROST

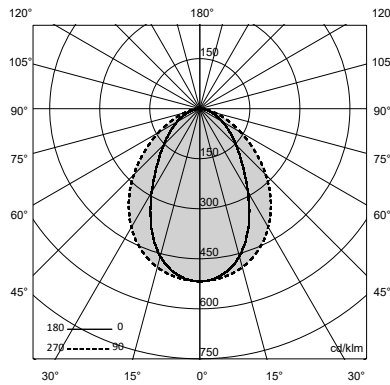

FROST ASYM 20x62°

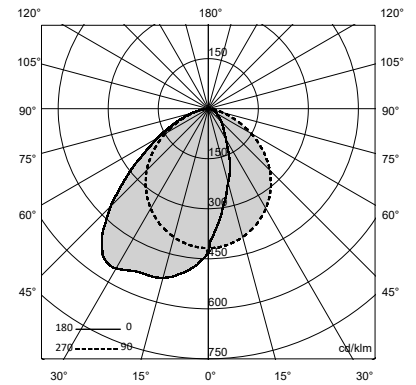

Night&Day

