

NEO TOP

Dot-free flexible LED light line, top bend
Ligne LED lumineuse opal flexible sans ponctuation
A4114.1312



Temperature de couleur CCT
2300K - 2700K - 3000K - 4000K - 5000K | DW
2700/5000KR / G / B / Y | RGB | RGBW | RGBX

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | 82/92+

Puissance lumineuse & Angle ouverture Luminous output & Beam angle
(@4000K) 620 lm & 110°

Puissance Power
11w/m (2300K/2700K/3000K/4000K/5000K) | 14w/m (DW)
9w/m (R/G/B/Y) | 13w/m (RGB) | 17w/m (RGBW) | 21w/m (RGBX)

Coupe Cutting pace
50mm (2300K/2700K/3000K/4000K/5000K) | 31.25mm (DW)
50mm (R/G/B/Y) | 83mm (RGB) | 62.5mm (RGBW) | 71.43mm (RGBX)

Dimensions & Rayon courbure mini Dimensions & min. bending radius
(10m possible for W & R/G/B/Y) 5000 x 13 x 12 mm | > 60 mm

Indices de protection & normes Standards
IP67 | IK08 | LM80 | CE | UL Listed
Flame Resistant - UV Resistant - Solvent Resistant - Saltwater Resistant

Tension alimentation & Classe isolation Input voltage & Class
24Vdc | class III

Température d'utilisation Ambient temperature
- 20°C / + 40°C









A4114.1312.DW

CCT & luminous flux

2300K	640 lm/m	823/923
2700K	640 lm/m	827/927
3000K	670 lm/m	830/930
4000K	670 lm/m	840/940
5000K	670lm/m	850/950
2700K/5000K	2x300 lm/m	DW
Red	620/630 nm	R
Green	525/530 nm	G
Blue	465/470 nm	B
Yellow	587/592 nm	Y
RGB		RGB
RGBW 2700K		RGB27
RGBW 3500K		RGB35
RGBW 4500K		RGB45
RGBW 5000K		RGB50

RGBX pixel (SPI UCS1903N) RGBX
12 pixels/m and 36 adresses/m

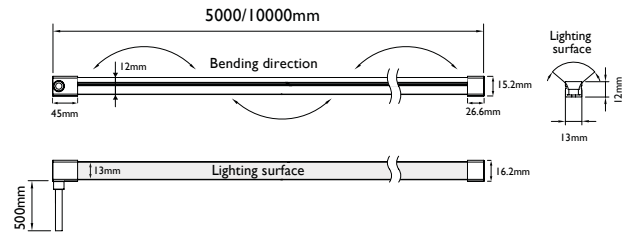

Endcap Dimensions :

- Full encapsulated endcap
- "No shadow" endcap

