

ULTRA EFFICIENCY 96

Linear strip with high efficiency >170 lm/w and cri96
Ruban haute efficacité >170 lm/w et cri96

A4196



Indice de Rendu de Couleur IRC Color Rendering CRI
>96

Température de couleur Color CCT
2200K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6500K

Rendement Luminous Efficacy
(@4000K) 170lm/w

Puissance & nombre de led Power & number of Led
7.2 w/m 80 led/m | 11.5 w/m 128 led/m | 14.4w/m 160 led/m | 21.6w/m 240 led/m

Coupe Cut
100 mm (7w) | 62.5 mm (11w) | 50 mm (14w) | 33.3 mm (21w)

Dimensions Dimensions
5000 x 10 x 2 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°C

Tension d'alimentation Input voltage
24Vdc



A4196.21.240.930.IP20.DALI

Power & number led/m

21.6 w/m & 240 led/m (170 lm/w @4000K)	21.240
14.4 w/m & 160 led/m (170 lm/w @4000K)	14.160
11.5 w/m & 128 led/m (170 lm/w @4000K)	11.128
7.2 w/m & 80 led/m (170 lm/w @4000K)	07.80

Led Color	7w/m	11 w/m	14 w/m	21 w/m	
2200K	900 lm	1690 lm	2100 lm	3300 lm	922
2400K	950 lm	1720 lm	2190 lm	3360 lm	924
2700K	1080 lm	1850 lm	2320 lm	3490 lm	927
3000K	1080 lm	1850 lm	2320 lm	3490 lm	930
3500K	1150 lm	1900 lm	2380 lm	3580 lm	935
4000K	1220 lm	1950 lm	2440 lm	3670 lm	940
5000K	1220 lm	1950 lm	2440 lm	3670 lm	950

IP Rating


IP 20
Custom (IP54 or IP65)

Dimming


No dimming
Dali
Dmx
Dimming 0/1-10 V

HF
DALI
DMX
D10


21.6w & 240led/m

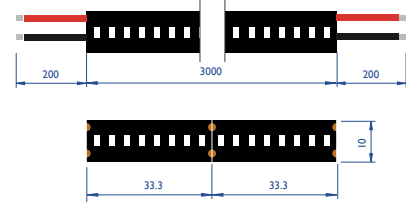

14.4w & 160led/m

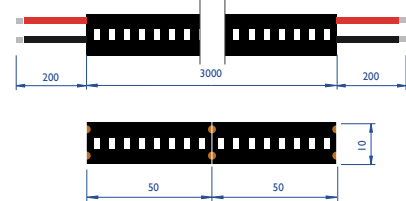

11.5w & 128led/m

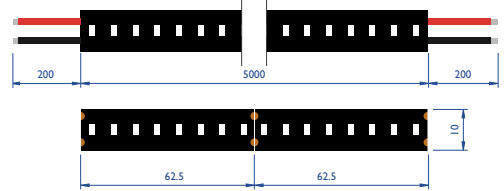

7.2w & 80led/m

