

# NEO 3D HONEYCOMB

Flexible light line with low glare honeycomb louver  
Ligne lumineuse flexible basse luminance nid d'abeille  
A4360



**Temperature de couleur CCT**  
2200K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K

**Precision de couleur & IRC Color consistency & CRI**  
OneBinOnly & CRI 90+

**Puissance lumineuse & Angle ouverture Luminous output & Beam angle**  
(@4000K) 280 lm & 50° (UGR<19)

**Puissance Power**  
14w/m


**Coupe Cutting Pace**  
50 mm

**Dimensions & courbure mini Dimensions & min. bending radius**  
5000 x 16 x 16 mm & R > 60 mm for Top Bend and R > 140 mm for Side Bend

**Indices de protection & normes Standards**  
IP67 | IK06 | LM80 | CE | UL Listed  
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

**Tension alimentation & Classe isolation Input voltage & Class**  
24Vdc & class III

**Température d'utilisation Ambient temperature**  
- 20°C / + 45°C

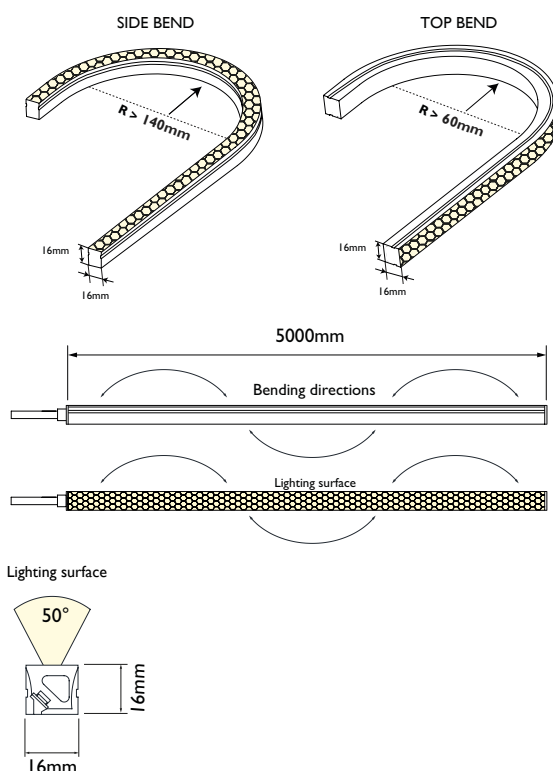

## CCT & luminous flux

|       |          |     |
|-------|----------|-----|
| 2200K | 230 lm/m | 922 |
| 2400K | 235 lm/m | 924 |
| 2700K | 252 lm/m | 927 |
| 3000K | 260 lm/m | 930 |
| 3500K | 272 lm/m | 950 |
| 4000K | 280 lm/m | 940 |
| 5000K | 275 lm/m | 950 |
| 6000K | 275 lm/m | 960 |

## IP Rating

IP67 IP67


## Dimming

No dimming HF  
Dali DALI  
Dmx DMX  
Dimming 0/1 - 10VDC D10  
Phase dimming (TRIAC)SX PHA


## A4360.930.IP67.DALI

## Entry cable / Entrée de cable



IP67 No dark cap - Axis outlet

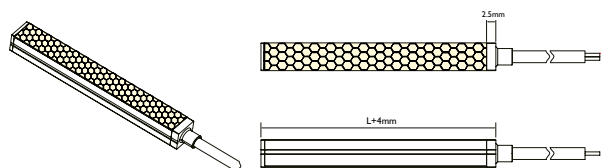

IP67 No dark cap - Bottom outlet

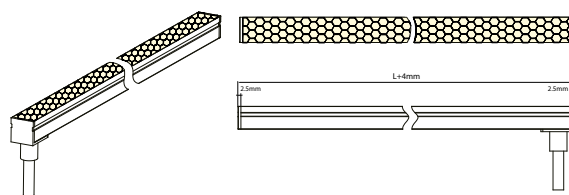


IP67 No dark cap - Side outlet

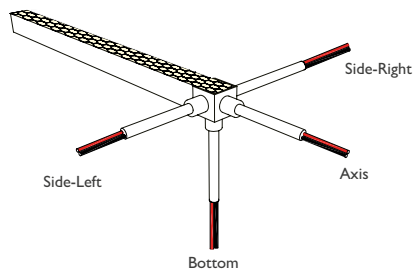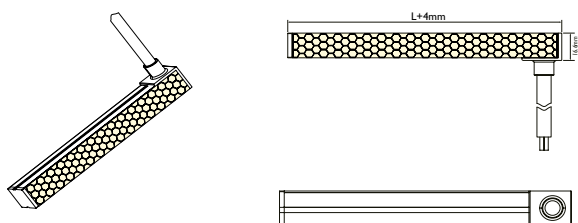



## Fixing Accessories / Accessoires Fixation




A4360 Alu Clip



A4360 Alu Rail



A4360 Moldable Groove



A4360 Alu Clip

