

NEO 3D LOUVER

Flexible light line with low glare linear louver
Ligne lumineuse flexible basse luminance Louvre
A4361



Temperature de couleur CCT
2200K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K
DW(2700-6000K) - RGB

Precision de couleur & IRC Color consistency & CRI
OneBinOnly & CRI 90+

Puissanc/e lumineuse & Angle ouverture Luminous output & Beam angle
(@RGB) 190 lm | (@4000K & DW) 450 lm & 110°x 45°

Puissance Power
14w/m (W) | 14w/m (DW) | 14w/m (RGB)


Coupe Cutting Pace
Free cut (White) | 50 mm (DW) | 50 mm (RGB)

Dimensions & courbure mini Dimensions & min. bending radius
5000 x 16 x 16 mm | R > 60 mm for Top Bend and R > 140 mm for Side Bend

Indices de protection & normes Standards
IP67 | IK06 | LM80 | CE | UL Listed
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24Vdc & class III

Température d'utilisation Ambient temperature
- 20°C / + 45°C

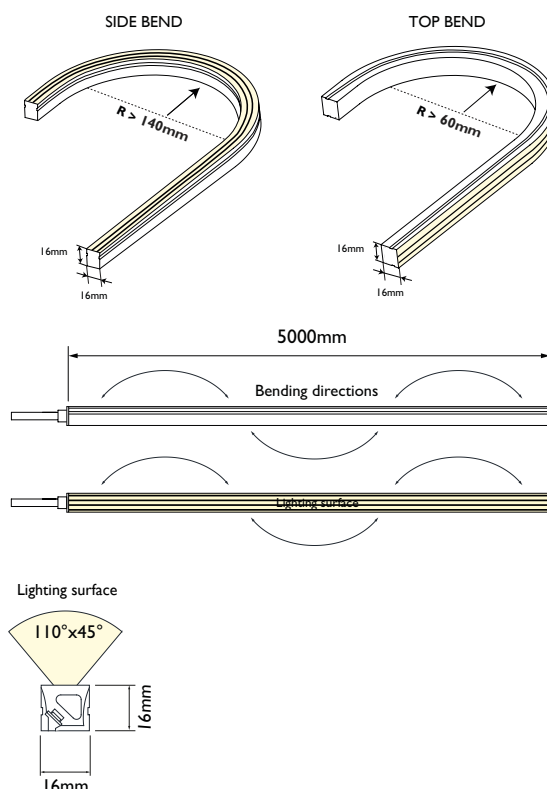

A4361.930.IP67.DALI

CCT & luminous flux

2200K	370 lm/m	922
2400K	380 lm/m	924
2700K	405 lm/m	927
3000K	415 lm/m	930
3500K	437 lm/m	935
4000K	450 lm/m	940
5000K	440 lm/m	950
6000K	440 lm/m	960

2700/6000K	450 lm/m	DW
RGB	190 lm/m	RGB

IP Rating


IP67	IP67
------	------

Dimming


No dimming	HF
Dali	DALI
Dmx	DMX
Dimming 0/1 - 10VDC	D10
Phase dimming (TRIAC)SX	PHA

Entry cable / Entrée de câble



IP67 No dark cap - Axis outlet

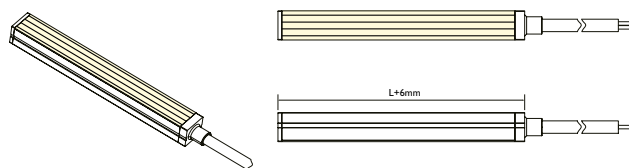

IP67 No dark cap - Bottom outlet

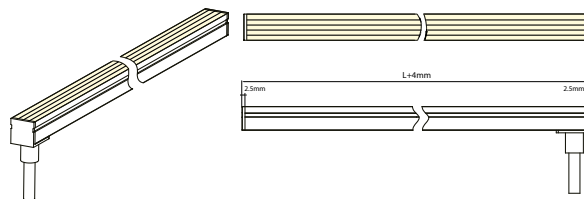


IP67 No dark cap - Side outlet

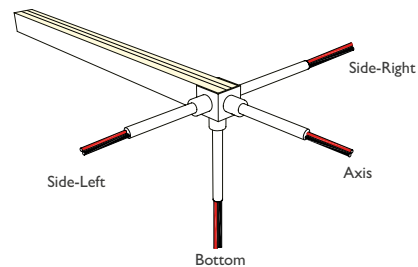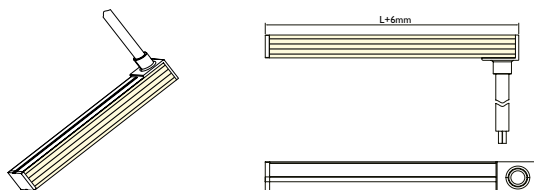


Fixing Accessories / Accessoires Fixation





A436I Alu Clip



A436I Alu Rail



A436I Moldable Groove



A436I Alu Clip

