

# ULYSSE

Profile with IP65 diffusor  
Profil avec diffuseur IP65

A39101




**Puissance maxi Power max**  
32 w/m

**Dimensions Dimensions**  
20.4 x 19.8 mm

**Longueur maximale Max.length**  
3000 mm

**Température d'utilisation Ambient temp.**  
- 10°C / + 40°C



## A39101.C9.IP20.00.OP.DALI

### Type of led

CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Standard	A4108	ST
CRI92	A4109	C9
RGB	A4106	RGB
RGBW	A4107	RGBW
RGB2W	A4117	RGB2W
Hi Efficacy	A4111	HE
Ultra Efficacy	A4116	UE

### IP Rating

IP20	IP20
IP54	IP54
IP65 H	IP65

### Finishes


Aluminium anodised silver	00
Aluminium anodised black	04

### Cover & Optic


Opal	OP
Frost	FR
Night & Day	ND
Optic 60°	60

### Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc	D10
Phase Dimming Digital	PHD

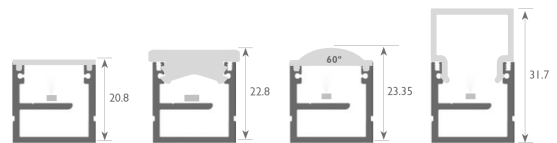

A39101.OP/FR  
Polycarbonat diffusor ip65  
Opal or Frost  
Fl 850°C



A39101.BW  
Diffusor Black&White



A39101.60  
Optic 60°



A39101.EC  
End cap



A39101.SUS  
Suspension kit



A39101.LP10D  
Clips Inox SS



A39101.LP140  
Clips encastre recessed



A39101.LP151  
Clips adustable