


ROMULUS XL

Profile with IP65 diffusor
Profil avec diffuseur IP65

A39104

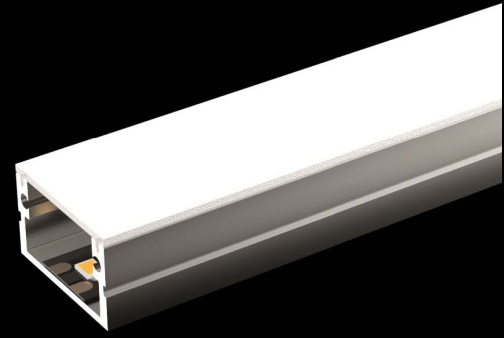





Puissance maxi Power max
35 w/m

Dimensions Dimensions
20 x 11 mm

Longueur maximale Max.length
3000 mm

Fil incandescent Glow wire test
Night&Day 650°C - Opal Frost 60° 850°C

Température d'utilisation Ambient temp.
- 10°C / + 40°C



A39104.C9.IP65.00.OP.DALI

Type of led	A4199	C99	
Pure CRI99	A4101	CR	
UltraCRI	A4102	DW	
Dynamic White	A4109	C9	
Regular	A4106	RGB	
RGB	A4107	RGBW	
RGBW	A4117	RGB2W	
RGB2W	A4111	HE	
High Efficacy	A4116	UE	
Ultra Efficacy			
IP Rating			
IP20		IP20	
IP54		IP54	
IP65H		IP65	
Finishes			
Aluminium anodised silver		00	
Aluminium anodised black		04	
Cover & Optic			
Opal	PC	OP	
Frost	PC	FR	
F60°	PC	F60	
Night & Day	PC	ND	
Dimming			
No dimming		HF	
Dali		DALI	
Dmx		DMX	
Dimming & to 10Vdc		D10	
Phase Dimming Digital		PHD	