


ODIN

Opal profile
Profil opal

A39172



Puissance maxi	Power max
	32 w/m
Dimensions	Dimensions
	D60 mm
Longueur maximale	Max.length
	3000 mm
Température d'utilisation	Ambiant temp.
	- 10°C / + 40°C

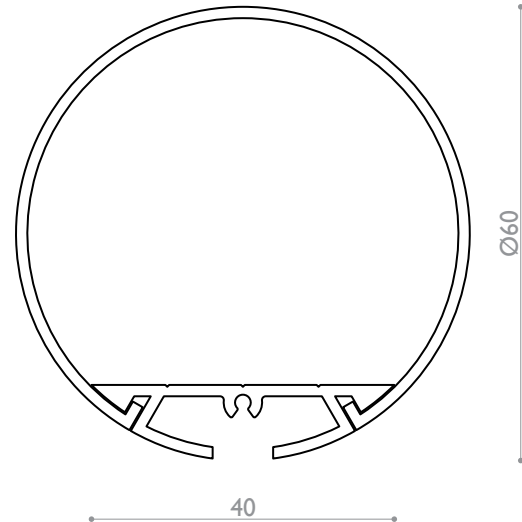

A39172.C9.IP20.OP.DALI

Type of led

CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Standard	A4108	ST
CRI92	A4109	C9
RGB	A4106	RGB
RGBW	A4107	RGBW
RGB2W	A4117	RGB2W
High Efficacy	A4111	HE

IP Rating

IP20	IP20
IP54	IP54
IP67	IP67

Cover & Optic


Opal Polycarbonat	OP
-------------------	----

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc Phase	D10
Dimming Digital	PHD



A39172.KC010
Suspension kit
Silver/white/black



A39172.LPEHO



A39172.LPE01.I4
Opal Polycarbonat



A39172.LP226
Plastic endcap

ATEA

