

# OSCAR

Round profile with IP65 diffusor  
Profil cylindrique avec diffuseur IP65

A39174




**Puissance maxi Power max**  
40 w/m

**Dimensions Dimensions**

D 87 mm

**Longueur maximale Max.length**  
3000 mm

**Température d'utilisation Ambient temp.**

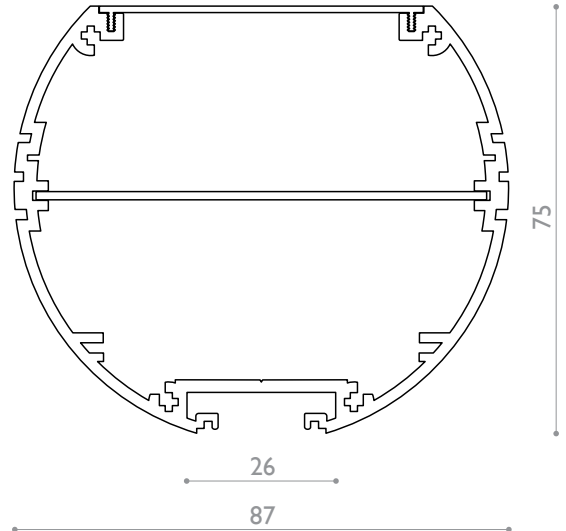

**A39174.C9.IP20.00.OP.DALI**

## Type of led

|                |       |       |
|----------------|-------|-------|
| CRI99          | A4199 | C99   |
| UltraCRI       | A4101 | CR    |
| Dynamic White  | A4102 | DW    |
| Standard       | A4108 | ST    |
| CRI92          | A4109 | C9    |
| RGB            | A4106 | RGB   |
| RGBW           | A4107 | RGBW  |
| RGB2W          | A4117 | RGB2W |
| High Efficacy  | A4111 | HE    |
| Ultra Efficacy | A4116 | UE    |

## IP Rating

|       |      |
|-------|------|
| IP20  | IP20 |
| IP54  | IP54 |
| IP65H | IP65 |

## Finishes

|                           |    |
|---------------------------|----|
| Aluminium anodised silver | 00 |
| Aluminium anodised black  | 04 |

## Cover & Optic

|                  |    |
|------------------|----|
| Opal             | OP |
| Prismatic UGR<19 | PR |

## Dimming

|                       |      |
|-----------------------|------|
| No dimming            | HF   |
| Dali                  | DALI |
| Dmx                   | DMX  |
| Dimming & to 10Vdc    | D10  |
| Phase Dimming Digital | PHD  |



A39174.KC07



A39174.KC08