

# CENTO T

Recessed profile with driver integrated - 2 led strip  
 Profil encastré avec driver intégré - 2 bandes led

A39180




**Puissance maxi Power max**  
50 w/m

**Dimensions Dimensions**  
126 x 68 mm

**Longueur maximale Max.length**  
3000 mm

**Température d'utilisation Ambient temp.**  
- 10°C / + 40°

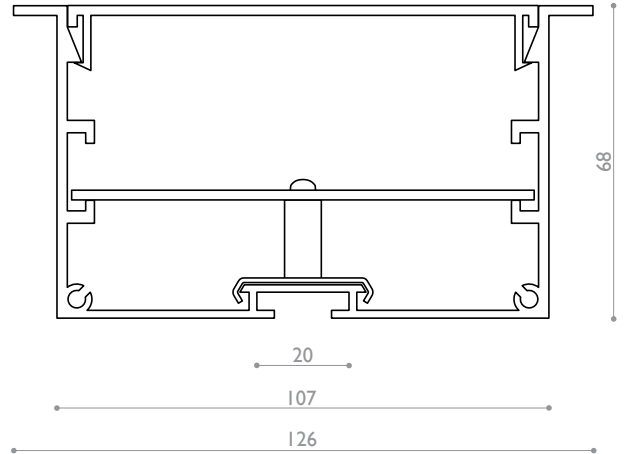

**A39180.C9.IP20.00.FR.DALI**

**Type of led**

Pure CRI99	A4199
UltraCRI	A4101
Dynamic White	A4102
Regular	A4109
RGB	A4106
RGB+W	A4107
RGB+2W	A4117
Ultra Efficiency 90	A4190
Ultra Efficiency 96	A4196

C99
CR
DW
C9
RGB
RGBW
RGB2W
UE90
UE96

**IP Rating**

IP20  
IP54  
IP65H

IP20  
IP54  
IP65

**Finishes**

Aluminium anodised silver  
Aluminium anodised black  
Aluminium anodised white

00  
04  
06

**Cover & Optic**


Frost

FR

**Dimming**

No dimming  
Dali  
Dmx  
Dimming 0/1-10Vdc  
Phase Dimming (TRIAC)

HF  
DALI  
DMX  
D10  
PHD



A39180  
Profil Alu



A39180.INT  
Inner Plate




A39180.INN  
Inner Tray



A39180.FR  
Polycarbonate cover



A39180.CLIP  
Fixing bracket



A39180.ENDCAP  
Aluminium Endcap



A39180.JUN  
Profile Junction



A39180.SUP  
Plate support