


GARLI

Profile with optic
Profil aluminium avec optique

A3945

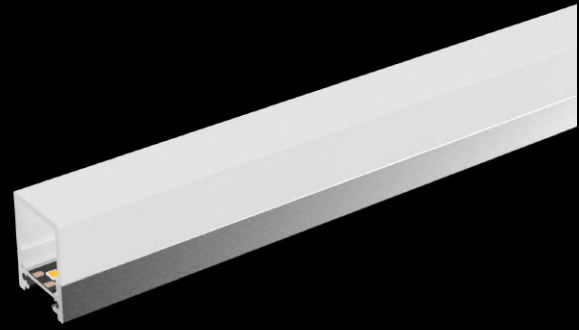



Puissance maxi Power max
25 w/m

Dimensions Dimensions
19 x 10.2 mm | 19 x 25 mm (High Optic)

Longueur maximale Max.length
3000 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°

Tension alimentation Input voltage
24 Vdc



A3945.C9.OP.00.IP20.DALI

Type of led

Pure CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Regular	A4109	C9
RGB	A4106	RGB
RGB+W	A4107	RGBW
RGB+2W	A4117	RGB2W
High Efficacy	A4111	HE
Dim to warm	A4126	D2W
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96

Optics

Opal	OP
Frost	FR
High Opal	HO

Finishes

Aluminium anodised silver	00
Aluminium anodised black	04
Painting RAL	RAL

IP Rating

IP20	IP20
IP54	IP54
IP65	IP65

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming 0/1-10V	D10
Phase Dimming (TRIAC)	PHD

Installations situations

