

# TOTEM XL OPTIC

Profile with range of optics  
Profil avec gamme d'optiques

A3950




**Puissance maxi Power max**  
40 w/m 12 w/ft

**Dimensions Dimensions**  
18 x 16 mm (20.5 x 22 mm with optic) 0.71" x 0.63" (0.81" x 0.87" with optic)

**Longueur maximale Max.length**  
2000 mm up to 78"

**Température d'utilisation Ambient temp.**  
- 10°C / + 40°C 14°F / 104°F

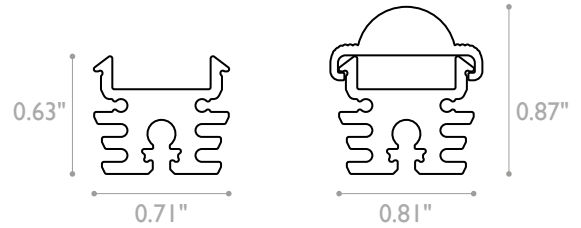

## A3950.C9.IP20.00.F30.DALI

### Type of led

Pure CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Regular	A4109	C9
RGB	A4106	RGB
RGB+W	A4107	RGBW
RGB+2W	A4117	RGB2W
Ultra Efficiency 90	A4190	UE90
Ultra Efficiency 96	A4196	UE96
Ultra Output 80	A4116	UO80
Dim to Warm	A4126	D2W
UltraCRI COB	A4130	COB98
Pixel RGBW	A4124	RGBWX

### IP Rating

IP20	IP20
IP54	IP54
IP65H (semi outdoor or indoor wet location)	IP65H
IP65R Resin (outdoor)	IP65R

### Finishes

Aluminium anodised silver	00
Aluminium anodised black	04

### Cover & Optic

	Trans.	
Opal	47%	OP
Frost	98%	FR
Frost 15°	85%	F15
Frost 30°	91%	F30
Frost 60°	93%	F60
Frost 90°	97%	F90

### Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming 0/1 - 10Vdc Phase	D10
Dimming (TRIAC)	PHD



A3950.04



A3950.CLP - 0° clips



A3950.C15 - 15° clips



A3950.C30 - 30° clips



A3950.C45 - 45° clips



A3950.C60 - 60° clips



A3950.CLA  
Adjustable clips



A3950.CLI  
Stainless Steel clips

# TOTEM XL OPTIC

Profile with range of optics  
Profil avec gamme d'optiques

A3950



Get Dialux files on : [www.atea.fr/3950.zip](http://www.atea.fr/3950.zip)

