

Puissance maxi Power max
30 w/m

3000 mm

Température d utilisation Ambient Temp
I C C



A396□C9.F30.00.IP20.DALI

Type of led

Pure CRI99 A4199
UltraCRI A4101
Dynamic White A4102
Regular A4109
RGB A4106
RGB+W A4107
RGB+2W A4117
80WODIMHIFIHQEII □ □ □
t icienc 6 A4196

C99
CR
DW
C9
RGB
RGBW
RGB2W
8□□
96

2SW/LEV

2SDO

Frost OP
Frost FR
Frost 15° F□
Frost 30°)□□
Frost 60°)□□
High Opal HO
Aluminium cover AL

Finishes



Aluminium anodised silver 00
Aluminium anodised black 04
Painting RAL 5□

IP Rating

IP20 IP20
IP54 IP54
IP65 IP65


Dimming

No dimming HF
Dali DALI
Dmx DMX
Dimming 0-10V D10
Phase Digital Dimming PHD

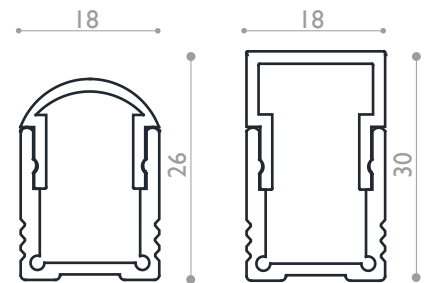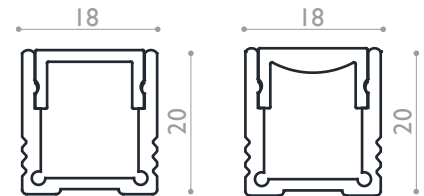

C IC

C IC



C IC

C IC

IC