

COBE T

Recessed profile with optic
Profil encastré avec optique

A3963




Puissance maxi Power max
35 w/m

Dimensions Dimensions
35 x 25 mm (Cutout 25 mm)

Longueur maximale Max.length
3000 mm

Température d'utilisation Ambient temp.
- 10°C / + 40°C

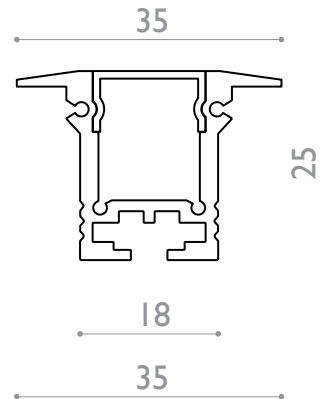

A3963.C9.IP20.00.OP.DALI

Type of led

Pure CRI99	A4199	C99
UltraCRI	A4101	CR
Dynamic White	A4102	DW
Regular	A4109	C9
RGB	A4106	RGB
RGBW	A4107	RGBW
RGB2W	A4117	RGB2W
High Efficacy	A4111	HE
Ultra Efficacy	A4116	UE

IP Rating

IP20	IP20
IP67H	IP67
IP65 resine (custom)	IP65

Finishes

Aluminium anodised silver	00
Aluminium anodised black White	04
Painting RAL	RAL

Cover & Optic

Opal	OP
Opal 500 kg	OP5
Frost	FR

Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming & to 10Vdc	D10
Phase Dimming Digital	PHD



A3963.RCS
RESSORT



A3963.CLI
Clips



A3963.CLS
Clips inox



A3963.LIN
Liaison