

ULTRACRI

High performance ledstrip CRI between 97 and 98
 Ruban led haute performance IRC compris entre 97 et 98
A4101



Indice de Rendu de Couleur IRC Color Rendering CRI
 98 (+/-2)

Temperature de couleur Color CCT
 1800K - 2100K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K

Rendement Luminous Efficacy
 60 lm/w - 90 lm/w


Puissance & nombre de led Power & number of Led
 7.6w/ft & 80 leds/ft (23w/m & 240 leds/m) | 6.8w/ft & 40 leds/ft (20w/m & 120 led/m)
 3.3w/ft & 40 leds/ft (10w/m & 120 led/m)

Coupe Cut
 1.30in (7.6w/ft) - 33.3mm (23w/m) | 1.96in (6.6w/ft) - 50mm (20w/m)
 1.96in (3.3w/ft) - 50mm (10w/m)


Dimensions Dimensions
 5000 mm x 10 mm x 2 mm | 196.8 x 0.39 x 0.07 in

Température d'utilisation Ambient temp.
 +15°F / + 105°F


23 w/m - 7.6 w/ft

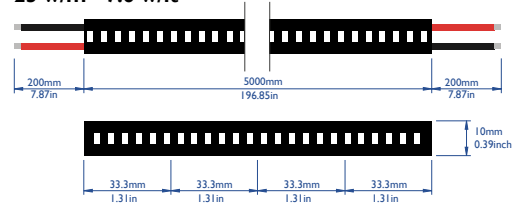

20 w/m - 6.6 w/ft

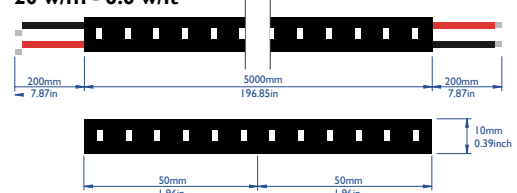

10 w/m - 3.3 w/ft

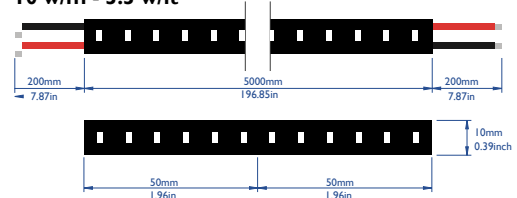

A4101.20.120.924.IP20.DALI

Power & number led/m

23 w/m - 7.6w/ft & 240 led/m - 80led/ft	23.240
20 w/m - 6.6w/ft & 120 led/m - 40led/ft	20.120
10 w/m - 3.3w/ft & 120 led/m - 40led/ft	10.120

Led Color	Im/ft	10 w/m 3.3w/ft	20 w/m 6.6w/ft	23 w/m 7.6w/ft	
1800K YP35	198 lm	363 lm	736 lm	918	
2100K YN35	219 lm	402 lm	736 lm	921	
2400K YM25	229 lm	415 lm	771 lm	924	
2700K YK45	271 lm	495 lm	806 lm	927	
3000K YJ65	271 lm	495 lm	806 lm	930	
3500K YI45	271 lm	495 lm	847 lm	935	
4000K YH54	290 lm	529 lm	847 lm	940	
5000K YF50G	290 lm	529 lm	847 lm	950	
6000K YC84	290 lm	556 lm	820 lm	960	

Custom binning Yxxx
 (See binning selection)

IP Rating




IP 20	IP20
IP 67 TUBE	IP67
Custom (IP20 or IP65)	

Dimming




No dimming	
Dali	HF
Dmx	DALI
Dimming 1 to 10vdc	DMX
	D10




2100K | YN35 | $x = 0,516$ $y = 0,414$ | Ra 97 | R9 87 | CQS 97

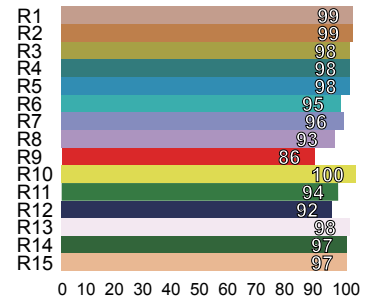




2400K | YM25 | $x = 0,487$ $y = 0,416$ | Ra 96 | R9 91 | CQS 95

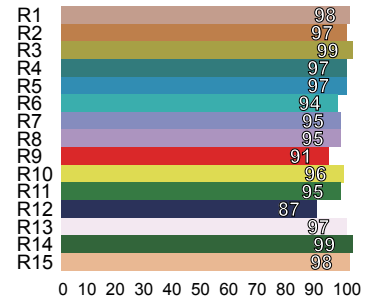




BINNING SELECTION FOR CUSTOM STRIP

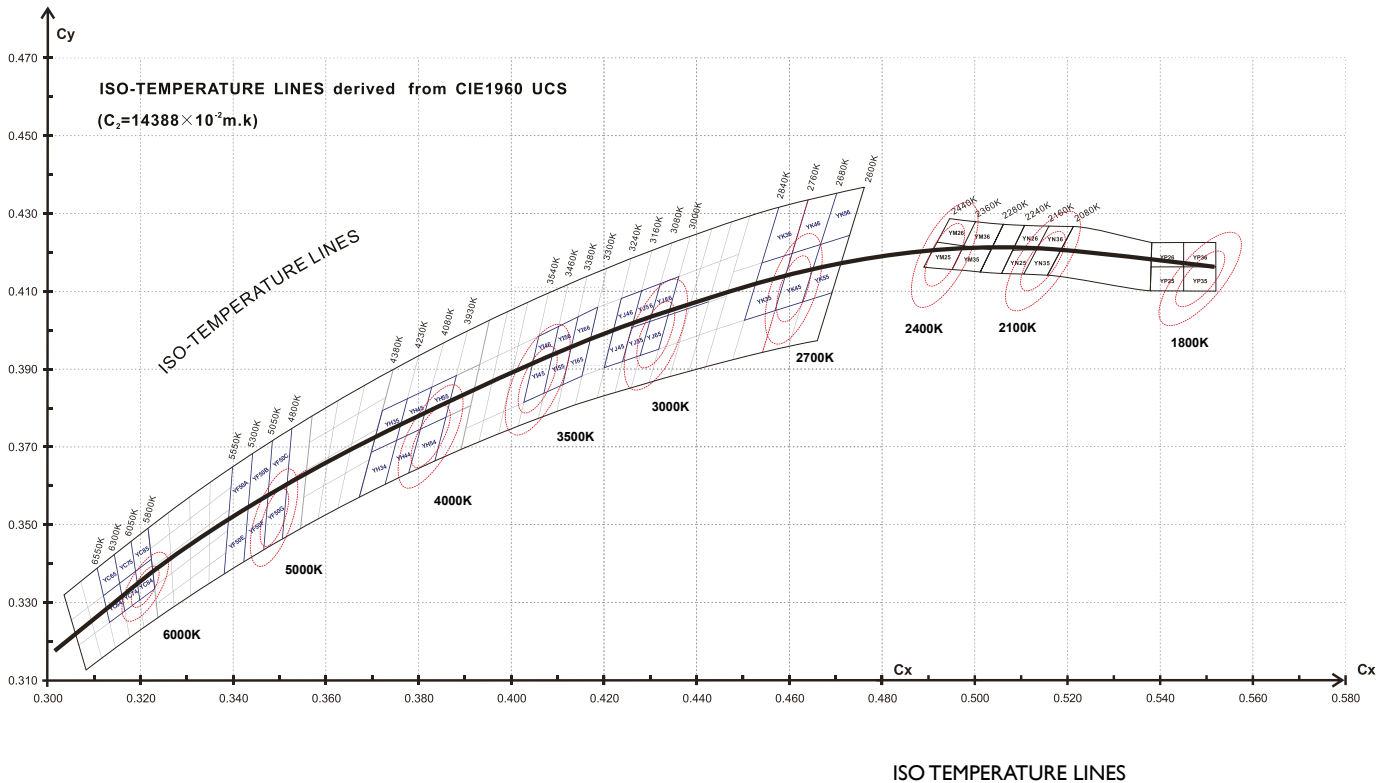




2700K | YK45 | $x = 0,460$ $y = 0,412$ | Ra 98 | R9 90 | CQS 94

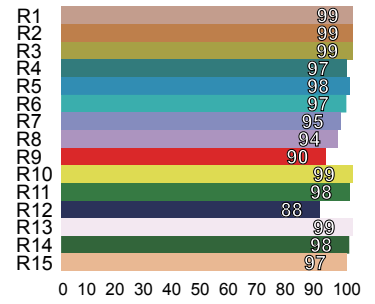




3000K | YJ65 | $x = 0,438$ $y = 0,406$ | Ra 97 | R9 90 | CQS 94

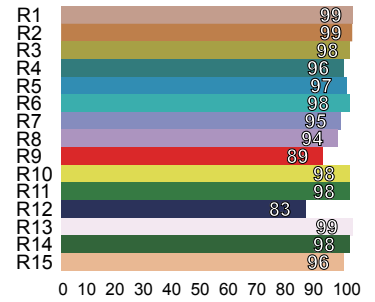

3500K | YI45 | $x = 0,405$ $y = 0,391$ | Ra 97 | R9 91 | CQS 94

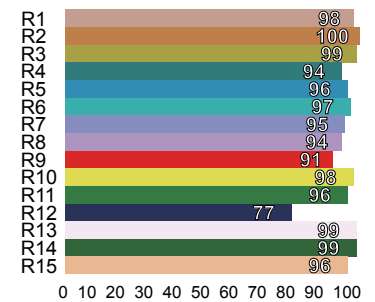

4000K | YH54 | $x = 0,380$ $y = 0,377$ | Ra 96 | R9 93 | CQS 93

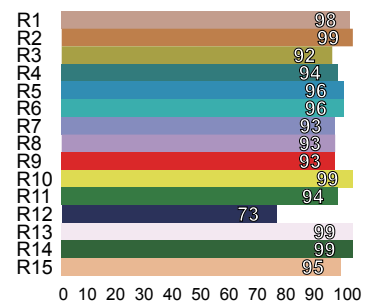

6000K | YC84 | $x = 0,320$ $y = 0,320$ | Ra 94 | R9 80 | CQS 90 | ANSI C78.377A

