

# NEO TOP DOME

Wide beam 210° flexible light line  
Ligne LED flexible faisceau 210°  
A4114.1615



Temperature de couleur CCT  
2300K - 2700K - 3000K - 3700K - 5000K | RGB

Precision de couleur & IRC Color consistency & CRI  
OneBinOnly | 82 / 95+

Puissance lumineuse & Angle ouverture Luminous output & Beam angle  
(@4000K) 820 lm & 210°

Puissance Power  
15w/m (RGB) | 12 w/m (W)




Coupe Cutting pace  
50mm (RGB) | 41.66mm (W)

Dimensions & Rayon courbure mini Dimensions & min. bending radius  
(15m possible) 5000 x 16 x 15 mm | > 60 mm

Indices de protection & normes Standards  
IP67 | IK08 | LM80 | CE | UL Listed  
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class  
24Vdc | class III

Température d'utilisation Ambient temperature  
- 20°C / + 40°C

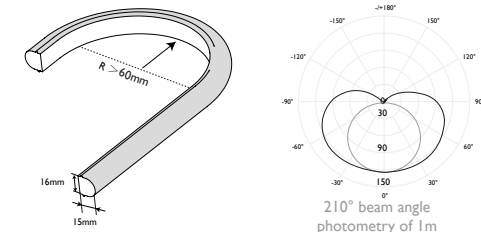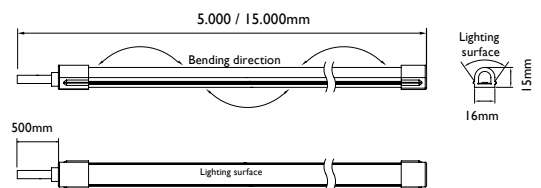

## CCT and luminous flux

2300K	750 lm/m
2700K	780 lm/m
3000K	800 lm/m
3700K	820 lm/m
5000K	800 lm/m

RGB

IP Rating  
IP 67

Dimming  
No dimming  
Dali  
Dmx  
Dimming I to 10VDC  
Phase dimming digital

823/923
827/927
830/930
837/937
850/950

RGB

IP67

HF  
DALI  
DMX  
D10  
PHA

## A4114.1615.930.IP67.DALI



A4114.1615.TRP  
Plastic Rail  
1000mm



A4114.1615.CLP  
Plastic Clip  
25mm



A4114.TRF  
Flat Aluminium Rail  
1000mm,



A4114.1615.CLF  
Flat Aluminium Clip  
25mm



A4114.1615.ECP  
Endcap set

**ATEA**

