

NEO SIDE SLIM6

Flexible Uniform LED Light Line, side bend, 6mm
Ligne LED flexible latéralement largeur 6 mm
A4115.0612



Temperature de couleur CCT
2300K - 2700K - 3000K - 4000K | DW 2300K/4000K
R / G / B / Y

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | 92+

Puissance lumineuse & Angle ouverture Luminous output & Beam angle
(@4000K - 0612) 280 lm & 110°

Puissance Power
0612 - 10w/m (2300K/2700K/3000K/4000K/DW) 8w/m (R/G/B/Y)
0612D - 6w/m (2300K/2700K/3000K/4000K)

Coupe Cutting pace
50mm (2300K/2700K/3000K/4000K)
62.50mm (DW) 50mm (R/G/B/Y)

Dimensions & Rayon courbure mini Dimensions & min. bending radius
(30m possible for 0612D) 5000 x 06 x 12mm | >30mm

Indices de protection & normes Standards
IP67 | IK06 | LM80 | CE | UL Listed
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24Vdc (0612) | 48Vdc (0612D) | class III

Température d'utilisation Ambient temperature
- 20°C / + 40°C



A4115.0612D.930.IP67.DALI

Length

5m 24Vdc
30m 48Vdc distance

0612
0612D

CCT & luminous flux

	24vdc	48vdc	
2300K	250 lm/m	150 lm/m	823/923
2700K	280 lm/m	150 lm/m	827/927
3000K	280 lm/m	170 lm/m	830/930
4000K	280 lm/m	190 lm/m	840/940

823/923
827/927
830/930
840/940





2300K/4000K 2x140 lm/m DW

Red	620/630 nm	R
Green	525/530 nm	G
Blue	465/470 nm	B
Yellow	587/592 nm	Y

R
G
B
Y

IP Rating
IP 67

IP67

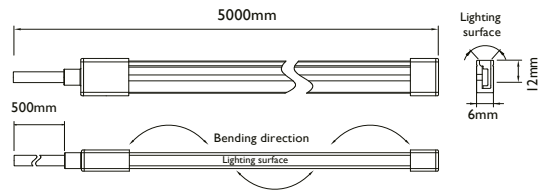

Axis output cable
500mm



A4115.0612.TRP
Plastic Rail
1000mm



A4115.0612.CLP
Plastic Clip
25mm



A4115.0612.TRA
Aluminium Rail
1000mm



A4115.0612.CLA
Aluminium Clip
25mm

A4115.0612.RGR
Recessed groove
1000mm (2x500mm)



A4115.0612.TRH
Aluminium Rail High
1000mm



A4115.0612.CLH
Aluminium Clip High
25mm



A4115.0612.MGS
Moldable groove
1000mm (2x500mm)

ATEA

