


PIXEL RGB

RGB DIGITAL strip with latest Monochip LED generation
 Ruban monochip RGB DIGITAL de dernière génération
A4120

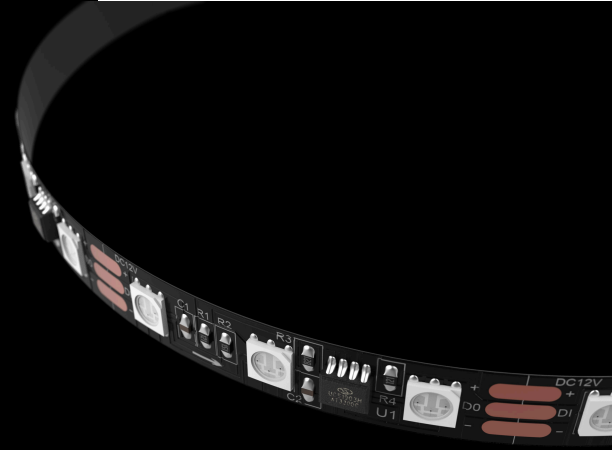

Couleur Color

■ R 620/625 nm | ■ G 520/525 | ■ B 465/470 nm

Puissance lumineuse Luminous output

268 lm/m (5v) | 531 lm/m (12v/24v)

Puissance Power

11w/m (5v) | 15w/m (12v/24v)

Nombre de led Number of led

60 leds/m

Coupe Cut

16.6mm (5v) | 50mm (12v) | 100 mm (24v)

Protocol & adresses Protocol & adresses

SPI SK6812 (compatible with WS2812) (5v) | SPI UCS1903 (12v/24v)
 180 channels/m (5v) | 60 channels/m (12v) | 30 channels/m (24v)

Dimensions Dimensions





5000 x 10 x 2 mm

Température d'utilisation Ambient temp.

-10°C / +40°C

Tension d'alimentation Input voltage

5v / 12v / 24v



A4120.15.12V.60.830.IP20


Power & Voltage

11 w/m & 5V **11.5V**
 15 w/m & 12V **15.12V**
 15 w/m & 24V **15.24V**

IP Rating

IP 20 **IP20**
 IP 54 **IP54**
 IP 65H **IP65**

2 Universes DMX : **A680U10**




Converter DMX-SPI : **A6802025**



2-4 Universes DMX : **A680U11**



Shielded Cable for Data transmission
 Câble 2x1 + (1x2x0,14) : **A680CABDAT**



4 output Art-Net : **A680C4Ex** (Standalone)

1-2-4-8 Universes



4 output Art-Net : **A680C4Lx** (Live)

4-8-12-16-24 Universes



up to 250m RJ45 range extender :

Transceiver 1-4 :
A680C4RXRJ45+ST



Transmitter :
A680C4TX



ATEA



ATEA