

# DISTANCE

Linear strip up to 50m by one end powered

Lineaire de longueur jusqu'à 50m

A4121



**Indice de Rendu de Couleur IRC Color Rendering CRI**  
80 / 90

**Temperature de couleur Color CCT**  
2100K - 2400K - 2700K - 3000K - 4000K - 6000K - R - G - B - Y

**Rendement Luminous Efficacy**  
120 lm/w (irc80 @ 4000K)

**Puissance & nombre de led Power & number of Led**  
5 w/m & 78 led/m | 7 w/m & 90 led/m | 9 w/m & 60 led/m


**Coupe Cutting unit**  
166.7 mm (5w 48v) | 100 mm (7w 36v & 9w 24v)

**Dimensions Dimensions**  
50m x 10x2mm (5w 48v) | 30m x 12x2mm (7w 36v) | 20m x 12x2mm (9w 24v)


**Température d'utilisation Ambient temp.**  
- 20°C / + 40°C

**Tension d'alimentation Input voltage**  
48Vdc (5w) | 36Vdc (7w) | 24Vdc (9w)


**9w & 24v**

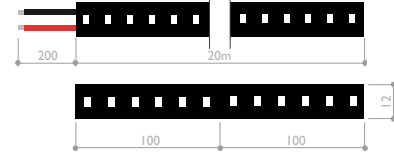

**7w & 36v**

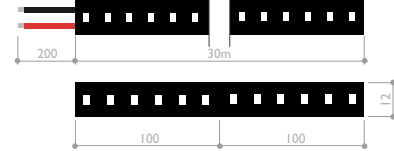

**5w & 48v**

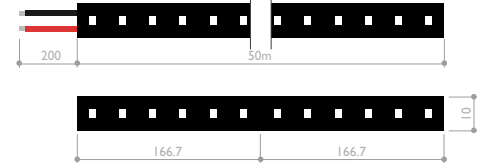

## A4121.05.78.830.IP20.DALI

### Power & number led/m

9 w/m & 60 led/m (20m & 24v)	09.60
7 w/m & 90 led/m (30m & 36v)	07.90
5 w/m & 78 led/m (50m & 48v)	05.78

Color	9 w/m	7 w/m	4 w/m	
2100K	860 lm	750 lm	470 lm	821
2400K	920 lm	820 lm	500 lm	824
2700K	960 lm	850 lm	530 lm	827
3000K	1000 lm	890 lm	550 lm	830
4000K	1030 lm	910 lm	570 lm	840
6000K	1040 lm	920 lm	570 lm	860

### IP Rating

IP 20	IP20
IP 65 T	IP65

### Dimming

No dimming	HF
Dali	DALI
Dmx	DMX
Dimming 1 to 10VDC	D10
Phase dimming digital	PHA

**ATEA**



CARREFOUR - SEUL SOLEIL