


SLIM 5 DYNAMIC WHITE

5mm Slim strip Ultra Efficiency DW CRI 95
Ruban Ultra Efficiency DW 5mm IRC 95
A4135



Temperature de couleur CCT
1800K - 2100K - 2400K - 2700K - 3000K - 4000K - 5000K - 6000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >95

Rendement lumineux Luminous Efficacy (@4000K)
95 lm/w


Puissance & nombre de led Power & number of Led
15 w/m & 2x120 leds/m

Coupe Cutting unit
50 mm

Dimensions Dimensions
5000 x 5 x 1.4 mm

Tension d'alimentation & Classe isolation Input voltage & Class
24Vdc | class III

Température d'utilisation Ambient temperature
- 10°C / + 40°C

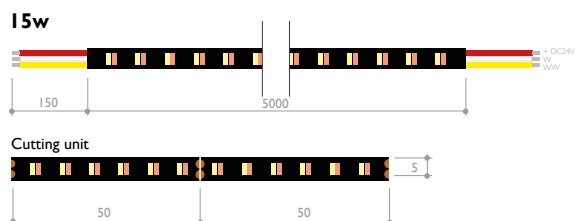

A4135.15.240.927.960.IP20.DALI6

Power & number leds/m
15 w/m & 240 leds/m
Custom power on request

CCT & luminous flux/m

	15w/m	
1800K	600 lm	918
2100K	630 lm	921
2400K	660 lm	924
2700K	660 lm	927
3000K	675 lm	930
4000K	690 lm	940
5000K	720 lm	950
6000K	753 lm	960

For example : 2700K+6000K = 440 lm+502 lm = 942 lm

IP Rating

IP20
IP65H (Wet indoor & Semi outdoor)

Dimming

Dali DT8
Dali DT6
DMX
Casambi

15.240

918

921

924

927

930

940

950

960

IP20

IP65H

DALI8

DALI6

DMX

CSB