

DYNAMIC WHITE UO

Tunable white Ultra Output Strip Led between 1800K & 6000K

Ruban led Ultra Output à blanc réglable de 1800K à 6000K

A4138



Temperature de couleur CCT
1800K - 2100K - 2400K - 2700K - 3000K - 4000K - 5000K - 6000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >93

Rendement lumineux Luminous Efficacy (@1800K + 6000K)
(43w) 99 lm/w | (31w) 130 lm/w


Puissance & nombre de led Power & number of Led
31 w/m & 224 (2x112) leds/m | 43 w/m & 256 (2x128) leds/m

Coupe Cutting unit
62,5 mm (@43w/m) | 71,43 mm (@31w/m)

Dimensions Dimensions
5000 x 12 x 2 mm

Tension d'alimentation & Classe isolation Input voltage & Class
24Vdc | class III

Température d'utilisation Ambient temp.
- 20°C / + 50°C

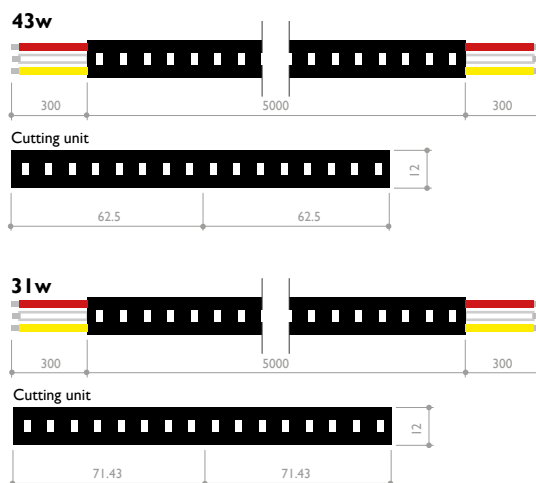

A4138.31.224.921.960.IP20.DALI6

Power & number leds/m

43 w/m & 256 leds/m

31 w/m & 224 leds/m

Custom power on request

CCT & luminous flux/m

	31w/m	43w/m	
1800K	1525 lm	1600 lm	918
2100K	1760 lm	1800 lm	921
2400K	1885 lm	1900 lm	924
2700K	2070 lm	2100 lm	927
3000K	2140 lm	2300 lm	930
4000K	2250 lm	2400 lm	940
5000K	2245 lm	2600 lm	950
6000K	2240 lm	2700 lm	960

For example : 2700K+4000K 43w/m = 2100 lm+2400 lm=4500 lm

IP Rating

IP20

IP54 (Wet indoor)

IP65H (Semi outdoor)

Pour des IP supérieur, veuillez nous consulter

For higher IP ratings, please contact us.

Dimming

Dali DT6

Dali DT8

DMX

Casambi

IP20
IP54
IP65H

DALI6
DALI8
DMX
CSB