


# TILES WHITE

High performance Tiles  
Dalles Led haute performance

A4161

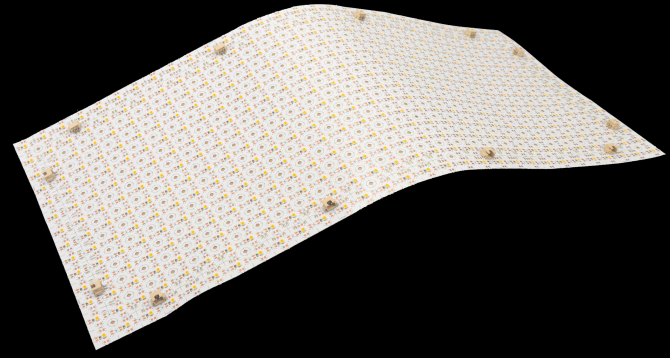

Indice de Rendu de Couleur IRC Color Rendering CRI  
92 (+/-1)

Temperature de couleur Color CCT  
2700K - 3000K - 4000K - 6500K

Rendement Luminous Efficacy  
90 lm/w - 105 lm/w


Puissance & nombre de led Power & number of Led  
11 w/sheet (93w/m<sup>2</sup>) | 420 leds/sheets (3550 leds/m<sup>2</sup>)

Coupe Cutting unit  
16.8 mm

Dimensions Dimensions  
503.5 mm x 235 mm x 6.8 mm

Tension d'alimentation Input voltage  
24 Vdc

Température d'utilisation Ambient temp.  
- 10°C / + 40°C

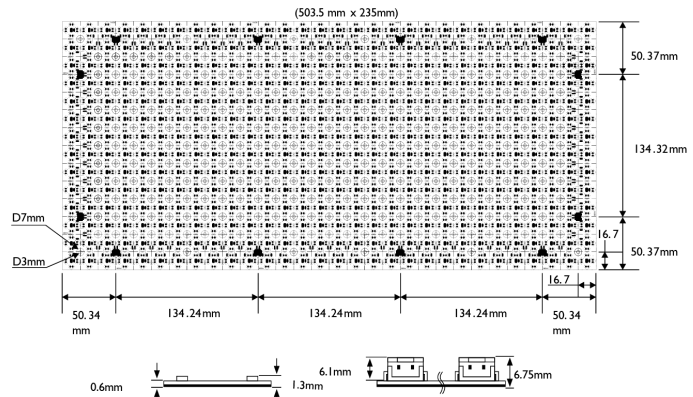

#### SUPPLY CABLE

**A4161.2P.300MM** Single white, power input cable, 2 PIN, 20awg, 300mm length



#### JUMP CABLE

**A4161.2P.50MM** Single white, short sheet-TO-sheet connection wire, 2 PIN, 20awg, 50mm length

**A4161.2P.150MM** Single white, long sheet-TO-sheet connection wire, 2 PIN, 20awg, 150mm length




Strip sheets can be cut into many custom shapes.

When cutting strips, it is important to use only the pre-marked cut lines on the sheet and also to maintain electrical contact.

The images below represent the smallest possible linear routing types.

The green box represents strip routing types that work by preserving the electrical connection, and the one in red represents a routing type that will not function correctly due to interruptions of the electrical connection.

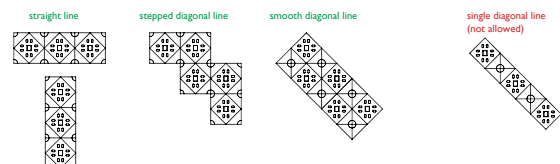

#### A4161.II.420.930.IP20.DALI

Power & number led/m  
11 w/sheet & 420 leds/sheet

Led Color 11 w/sheet (93w/m<sup>2</sup>)

2700K	1012 lm/sheet	8550 lm/m <sup>2</sup>	927
3000K	1012 lm/sheet	8550 lm/m <sup>2</sup>	930
4000K	1144 lm/sheet	9660 lm/m <sup>2</sup>	940
6500K	1078 lm/sheet	9100 lm/m <sup>2</sup>	965

IP Rating  
IP 20

IP20

Dimming  
No dimming  
Dali  
Dmx  
Dimming I to 10VDC  
Phase dimming

HF  
DALI  
DMX  
D10  
PH