


# TILES DYNAMIC WHITE

Tunable white tile between 2700K & 6500K  
Dalles led à blanc réglable de 2700K à 6500K

A4162

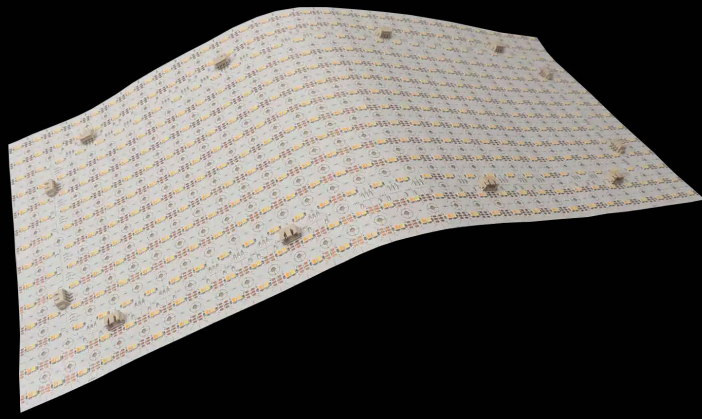

**Indice de Rendu de Couleur IRC Color Rendering CRI**  
92 (+/-1)

**Temperature de couleur Color CCT**  
2700K+ 6500K

**Rendement Luminous Efficacy**  
90 lm/w - 100 lm/w


**Puissance & nombre de led Power & number of Led**  
22w/sheet (186w/m<sup>2</sup>) | 840 leds/sheet (7100 leds/m<sup>2</sup>)

**Coupe Cutting unit**  
16.8 mm

**Dimensions Dimensions**  
503.5 mm x 235 mm x 6.8 mm

**Tension d'alimentation Input voltage**  
24 Vdc

**Température d'utilisation Ambient temp.**  
- 10°C / + 40°C

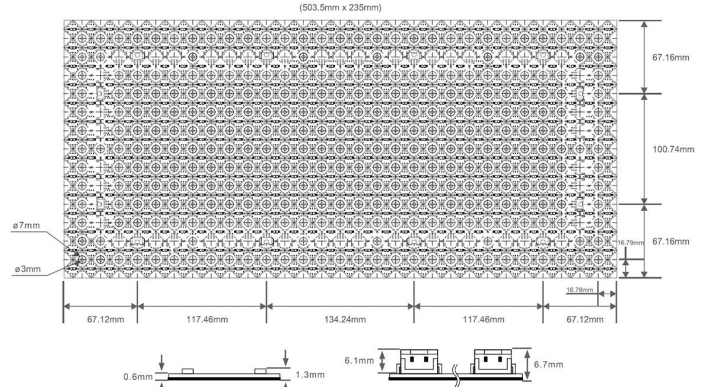

#### SUPPLY CABLE

**A4162.3P.300MM**

Tunable white, power input cable, 3 PIN, 20awg, 300mm length



#### JUMP CABLE

**A4162.3P.60MM**

Tunable white, short sheet-TO-sheet connection wire, 3 PIN, 20awg, 60mm length



**A4162.3P.150MM**

Tunable white, long sheet-TO-sheet connection wire, 3 PIN, 20awg, 150mm length




Strip sheets can be cut into many custom shapes.

When cutting strips, it is important to use only the pre-marked cut lines on the sheet and also to maintain electrical contact.

The images below represent the smallest possible linear routing types.

The green box represents strip routing types that work by preserving the electrical connection, and the one in red represents a routing type that will not function correctly due to interruptions of the electrical connection.

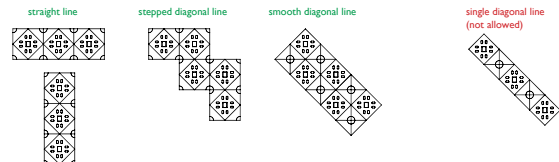

**Power & number led/sheet**  
22 w/sheet & 840 leds/sheet

22.840

**Led Color** 22w/sheet (186 w/m<sup>2</sup>)

2700K only 1012 lm 8550 lm/m<sup>2</sup>

6500K only 1078 lm 9100 lm/m<sup>2</sup>

2700+6500K 2090 lm 17665 lm/m<sup>2</sup>

927.965

**IP Rating**  
IP 20

IP20

**Dimming**

Dali

Dmx

Dimming I to 10VDC

DALI  
DMX  
D10