

HIGH EFFICIENCY 95

Linear strip with high efficiency >116 lm/w and cri95
Ruban haute efficacité >116 lm/w et cri95

A4195



Indice de Rendu de Couleur IRC Color Rendering CRI
>95

Temperature de couleur Color CCT
1800K - 2100K - 2300K - 2700K - 3000K - 3500K - 4000K - 5000K

Rendement Luminous Efficacy
116 to 127 lm/w

Puissance & nombre de led Power & number of Led
9.6 w/m & 80 led/m | 12w/m & 240 led/m | 23w/m & 240 led/m


Coupe Cut
100 mm (9.6w) | 33.3 mm (23w & 12w)

Dimensions Dimensions
5000 x 10 x 2 mm


Température d'utilisation Ambient temp.
- 10°C / + 40°C

Tension d'alimentation Input voltage
24Vdc


23w

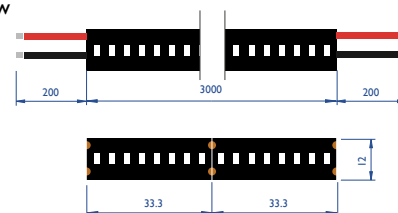

12w

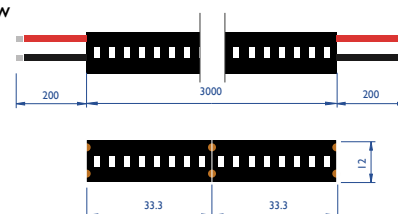

9.6w

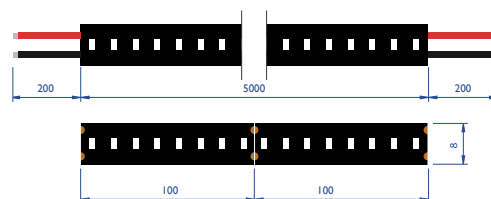

A4195.23.240.927.IP20.DALI

Power & number led/m

23 w/m & 240 led/m (121 lm/w @4000K) **23.240**
12 w/m & 240 led/m (127 lm/w @4000K) **12.240**
9.6 w/m & 80 led/m (116 lm/w @4000K) **09.80**

Led Color	9.6 w/m	12 w/m	23 w/m	
1800K	960 lm	1324 lm	2415 lm	918
2100K	1008 lm	1324 lm	2415 lm	921
2300K	1008 lm	1387 lm	2530 lm	923
2700K	1036 lm	1450 lm	2645 lm	927
3000K	1056 lm	1450 lm	2645 lm	930
3500K	1056 lm	1450 lm	2645 lm	935
4000K	1115 lm	1525 lm	2780 lm	940
5000K	1115 lm	1525 lm	2780 lm	950

IP Rating

IP 20
Custom (IP54 or IP65)

Dimming

No dimming
Dali
Dmx
Dimming 1 to 10VDC
Phase dimming digital

IP20

HF
DALI
DMX
D10
PHA