

PURE CRI

Ultimate performance ledstrip CRI99
 Ruban très haute performance IRC99
 A4199



Indice de Rendu de Couleur IRC Color Rendering CRI
 99 (+/-1)

Temperature de couleur Color CCT
 2200K - 2700K - 3000K - 4000K





Rendement Luminous Efficacy
 86 lm/w - 93 lm/w

Puissance & nombre de led Power & number of Led
 26 w/m & 140 led/m 7.92 w/ft & 43 led/ft
 13 w/m & 140 led/m 3.96 w/ft & 43 led/ft

Coupe Cut
 50 mm 1.95 in

Dimensions Dimensions
 5000 mm x 10 mm x 2 mm | 16.4 ft x 0.39 in x 0.08 in

Température d'utilisation Ambient temp.
 - 10°C / + 40°C 14°F / 100°F

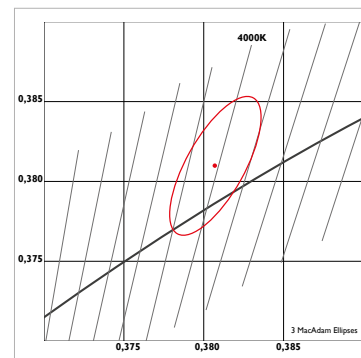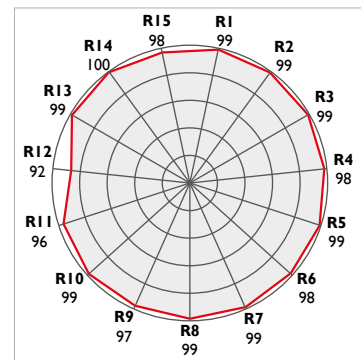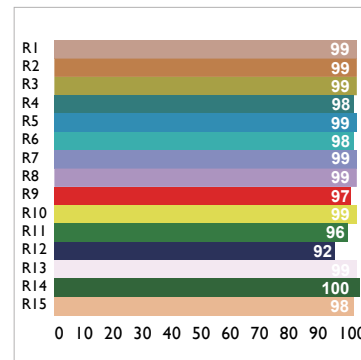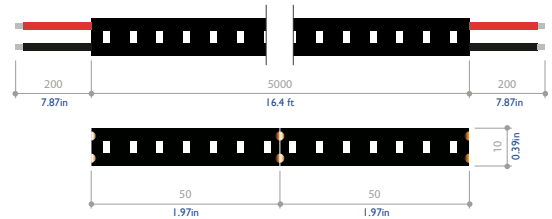

A4199.13.140.930.IP20.DALI

Power & number led/m

7.92 w/ft & 43 led/ft (26 w/m & 140 led/m) **26.140**
 3.96 w/ft & 43 led/ft (13 w/m & 140 led/m) **13.140**
 Custom (5 to 20w)

| Led Color flux | 13 w/m | 26 w/m | |
|----------------|-----------|-----------|------------|
| | 3.96 w/ft | 7.92 w/ft | |
| 2200K | 292 lm/ft | 585 lm/ft | 922 |
| 2700K | 347 lm/ft | 640 lm/ft | 927 |
| 3000K | 371 lm/ft | 682 lm/ft | 930 |
| 4000K | 414 lm/ft | 762 lm/ft | 940 |

IP Rating

IP 20
 IP 65 H

Dimming

No dimming
 Dali
 Dmx
 Dimming I to 10VDC

IP20
 IP65

HF
 DALI
 DMX
 D10