

NEO 3D WALL WASHER HIGH OUTPUT

3D LED light line, Wall washer, High Output
Ligne LED lumineuse 3D, Wall washer Haut rendement
A4333



Temperature de couleur CCT
2200K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K & 25°) 1565 lm (18w/m) - 3128 lm (36w/m)
15° | 30° | 40° | 60° | 15°x30° | 15°x60°

Puissance Power & leds
18w/m | 36w/m & 40Leds/m


Coupe Cutting unit
100mm

Dimensions & courbure mini Dimensions & min. bending
5000 x 20 x 20mm | >300mm (Side & Top)

Indices de protection & normes Standards
IP67 | IK08 | UV resistant | Solvent resistant | Saltwater resistant | Dirt Resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 25°C / + 50°C

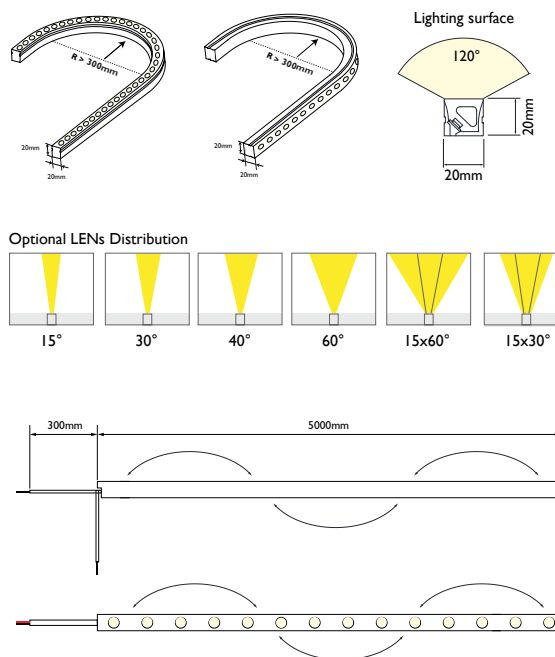


A4333.36.930.IP67.DALI

Power			
36w/m		36	
18w/m		18	
CCT & luminous flux			
	18w/m	36w/m	
2200K	1156 lm/m	2312 lm/m	922
2700K	1326 lm/m	2652 lm/m	927
3000K	1445 lm/m	2890 lm/m	930
3500K	1496 lm/m	2992 lm/m	935
4000K	1564 lm/m	3128 lm/m	940
5000K	1598 lm/m	3196 lm/m	950
6500K	1530 lm/m	3060 lm/m	965
IP Rating			
IP67			IP67
Dimming			
No dimming			HF
Dali			DALI
Dmx			DMX
Dimming 0/1 - 10VDC			D10
Casambi			CSB

Cable Entry / Entrée de câble



IP67 No dark Endcap - Axis & Bottom outlet

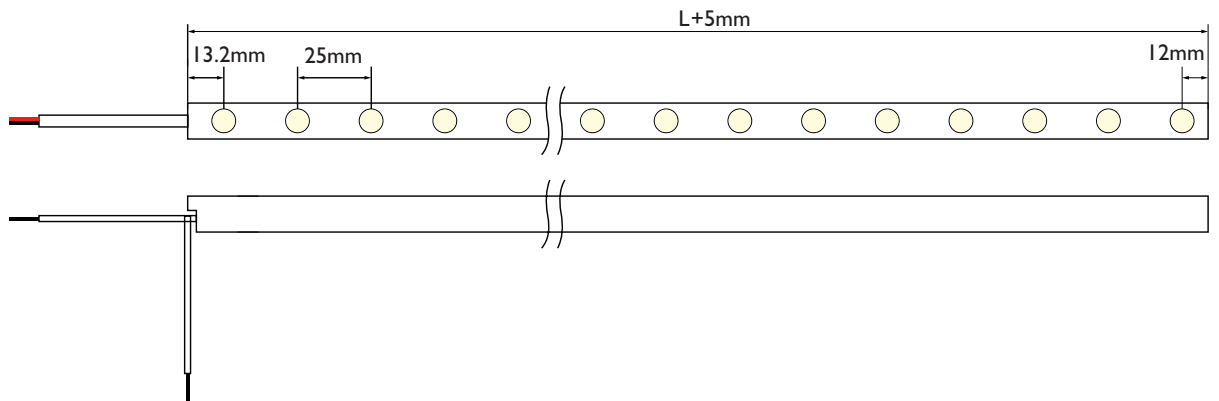

Fixing Accessories / Accessoires Fixation




A4333 Aluminum rail
1000mm



A4333 Aluminum clip
20mm



A4333 Moldable groove White
(cannot be upside down)
1000mm



Light distribution curves / Courbes photométrique

