

# NEO 3D WALLWASHER MINI

Mini 3D LED light line, Wall washer, IP65  
 Mini Ligne LED lumineuse 3D, Wall washer, IP65  
**A4334**



**Temperature de couleur CCT**  
 2700K - 3000K - 3500K - 4000K - 5000K

**Precision de couleur & IRC Color consistency & CRI**  
 OneBinOnly | >90

**Puissance lumineuse & Angle faisceau Luminous output & Beam angle**  
 (@4000K) 1890 lm & 35°

**Puissance Power & leds**  
 14.4w/m & 40Leds/m


**Coupe Cutting Unit**  
 100 mm

**Dimensions & courbure mini Dimensions & min. bending**  
 5000 x 13 x 14 mm | R > 50 mm

**Indices de protection & normes Standards**  
 IP65 | IK02 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

**Tension alimentation & Classe isolation Input voltage & Class**  
 24Vdc | class III

**Température d'utilisation Ambient temperature**  
 - 25°C / + 50°C

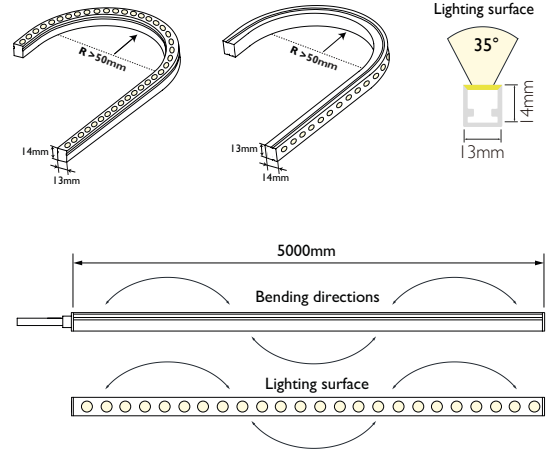

**A4334.14.930.IP65.DALI**

**Power**  
 14.4w/m



**CCT & luminous flux**

2700K	1530 lm/m	927
3000K	1725 lm/m	930
3500K	1815 lm/m	940
4000K	1890 lm/m	940
5000K	1770 lm/m	940

**IP Rating**  
 IP65

**Dimming**  
 No dimming


Dali  
 Dmx  
 Dimming 0/1 - 10VDC  
 Casambi

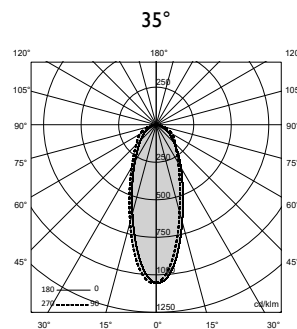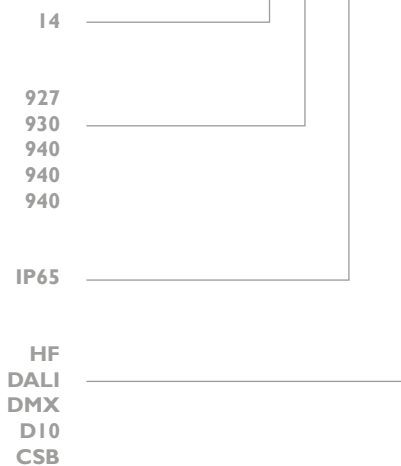

## Cable Entry / Entrée de câble


---

IP65 No dark Endcap - Axis outlet

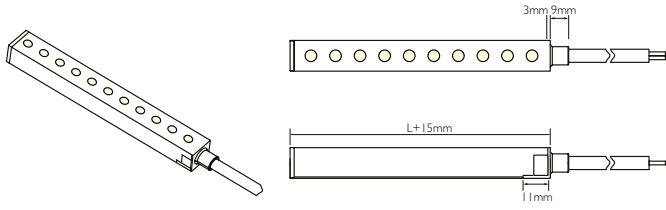

## Fixing Accessories / Accessoires Fixation

---

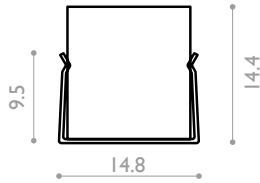

A4334 Moldable groove White  
1000mm (cannot be upside down)