

NEO 3D WALLWASHER MINI IP67

Mini 3D LED light line, Wall washer, IP67
Mini Ligne LED lumineuse 3D, Wall washer, IP67
A4335



Temperature de couleur CCT
2400K | 2700K | 3000K | 4000K | 5000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K&60°) 580 lm (10w/m) | 1160 lm (20w/m)
35° | 60° | 30°x50°

Puissance Power & leds
10w/m | 20w/m & 40Leds/m




Coupe Cutting Unit
25mm

Dimensions & courbure mini Dimensions & min. bending
5000 x 16 mm x 16 mm | R > 100mm (Side) & >150mm (Top)

Indices de protection & normes Standards
IP67 | IK08 | UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 25°C / + 40°C

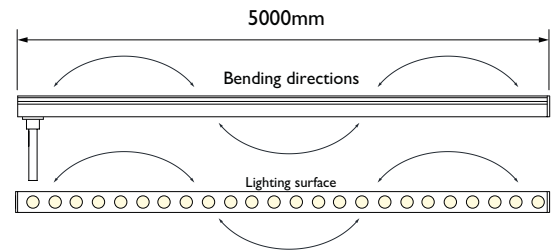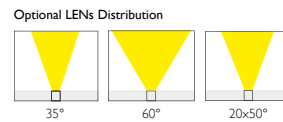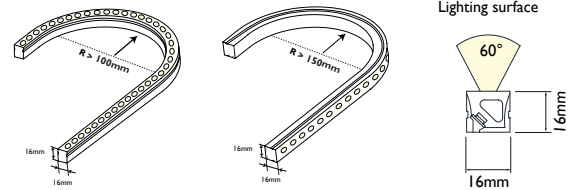


A4335.20.930.IP67.DALI


Power			
20w/m		20	
10w/m		10	
CCT & luminous flux			
	10 w/m	20 w/m	
2400K	490 lm/m	980 lm/m	923
2700K	520 lm/m	1040 lm/m	927
3000K	550 lm/m	1100 lm/m	930
4000K	580 lm/m	1160 lm/m	940
5000K	570 lm/m	1140 lm/m	950
IP Rating			
IP65		IP67	
Dimming			
No dimming		HF	
Dali		DALI	
Dmx		DMX	
Dimming I to 10VDC		D10	
Casambi		CSB	

Cable Entry / Entrée de câble


IP67 No dark Endcap - Axis outlet

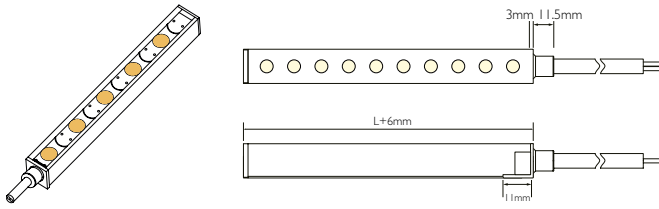


IP67 No dark Endcap - Bottom outlet

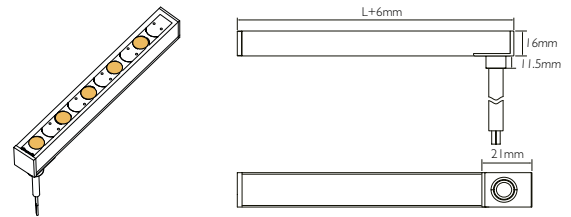

Fixing Accessories / Accessoires Fixation



A4335 Aluminum rail
2440mm

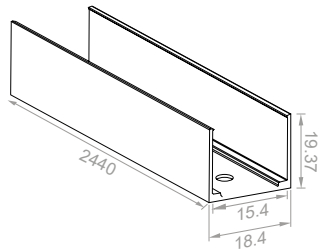

A4335 Aluminum clip
30mm

