

NEO TOP MICRO ASYMETRIC

Flexible uniform LED light line, asymmetric recessed, top bend
Ligne lumineuse LED Asymétrique encastrée, flexible verticalement

A4413



Temperature de couleur CCT
2700K - 3000K - 3500K - 4000K - 5000K - 6000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K) 520 lm | 120° Asymétrique 30°

Puissance Power
9w/m


Coupe Cutting Pace
Free Cutting

Dimensions & courbure mini Dimensions & min. bending g radius
5000 x 8 x 4.5 mm | > 50 mm

Indices de protection & normes Standards
IP67 | IK03 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 20°C / + 45°C

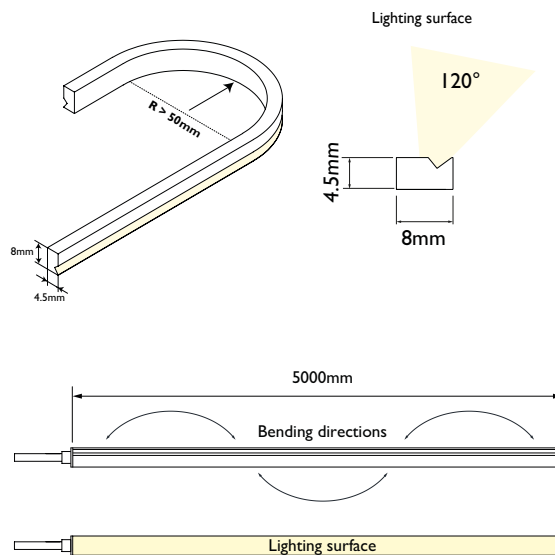

Power
9w/m

CCT & luminous flux

2700K	470 lm/m	927
3000K	480 lm/m	930
3500K	506 lm/m	935
4000K	522 lm/m	940
5000K	510 lm/m	950
6000K	510 lm/m	960

IP Rating
IP54

Dimming

No dimming

Dali

Dmx

Dimming 0/1 - 10VDC

Casambi

9

IP54

HF

DALI


DMX

DI0

CSB


A4413.9.930.IP54.DMX

120° Asym 30°




Cable Entry / Entrée de cable

IP54 Glued Endcap - Axis outlet



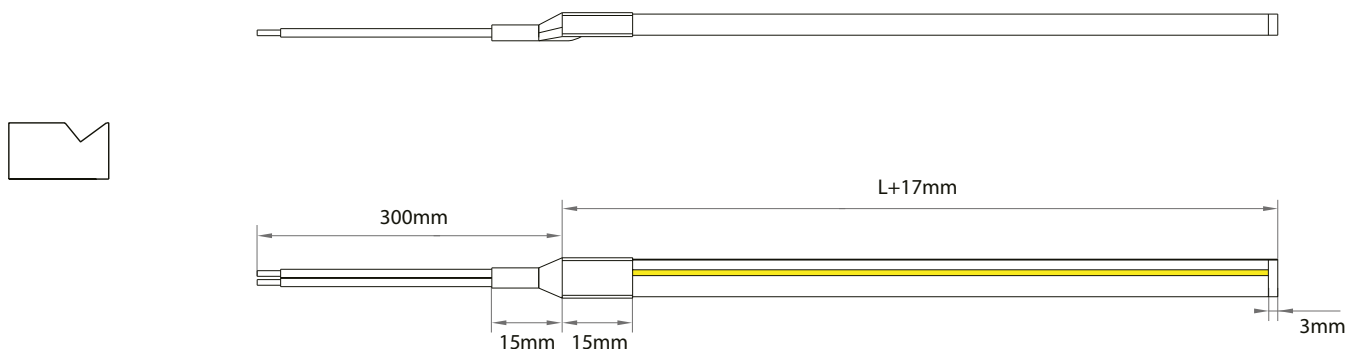


Installation / Installation

Peel off the adhesive tape on the backside and stick to the mounting surface directly.

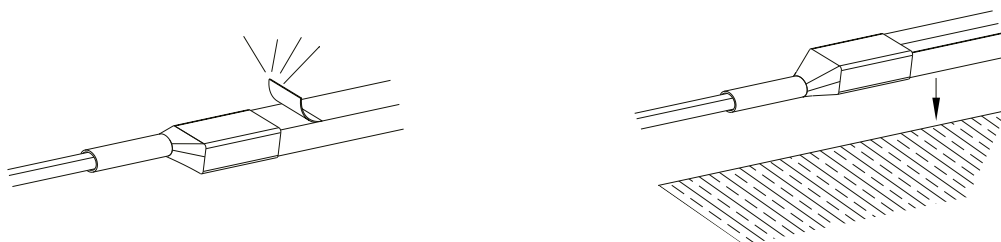

Shine Upwards

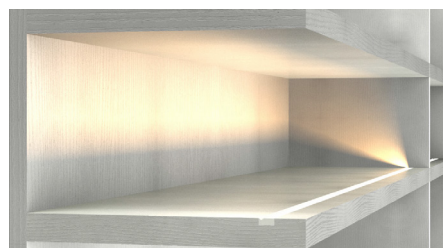

Shine Downwards

