

NEO TOP ULTRA EFFICIENCY

Flexible uniform LED light line, high efficiency, top bend
Ligne lumineuse LED de haut rendement, flexible verticalement
A4432



Temperature de couleur CCT
2200K | 2700K | 3000K | 4000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K-10W) 1145 lm | (@4000K-15W) 1491 lm | (@DW) 1300 lm & 115°

Puissance Power
10 & 15w/m (W) | 13W (DW)


Coupe Cutting Unit
(@W) 6.25 mm | (@DW) 8.33mm

Dimensions & courbure mini Dimensions & min. bending
5000 (@W-15W) | 10000 (@W-10W & DW) x 13 X 12 mm | R > 60 mm

Indices de protection & normes Standards
IP67 | IK08 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III


Température d'utilisation Ambient temperature
- 20°C / + 50°C

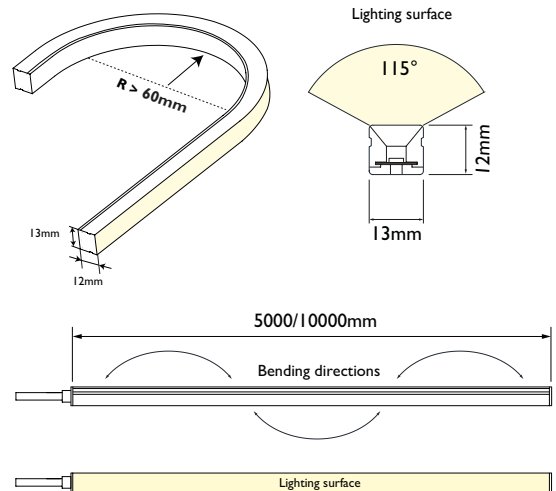


A4332.10.930.IP67.DALI				
Power				
15w/m		15		
13w/m (DW)		13		
10w/m		10		
CCT & luminous flux				
	10w/m	15w/m		
2200K	870 lm/m	1213 lm/m	923	
2700K	1030 lm/m	1467 lm/m	927	
3000K	1090 lm/m	1508 lm/m	930	
4000K	1145 lm/m	1491 lm/m	940	
		13w/m		
DW (2200-6000K)		1300 lm/m	DW	
IP Rating				
IP67		IP67		
Dimming				
No dimming		HF		
Dali		DALI		
Dmx		DMX		
Dimming 0/1 - 10VDC		D10		
Casambi		CSB		

Cable Entry / Entrée de câble


IP67 No Dark Endcap - Axis outlet

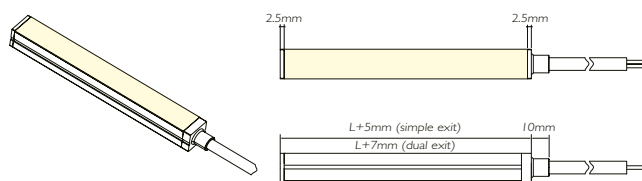


IP67 No Dark Endcap - Bottom outlet

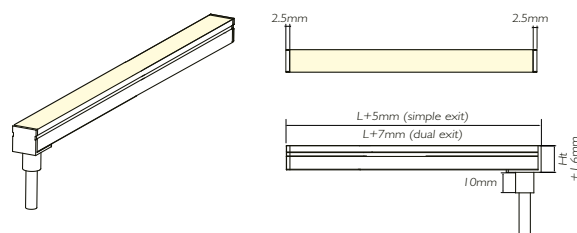

IP67 No Dark Endcap - Right side outlet

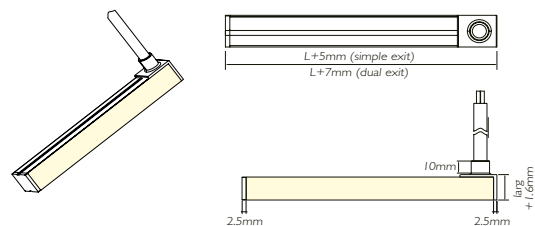


IP67 No Dark Endcap - Left side outlet

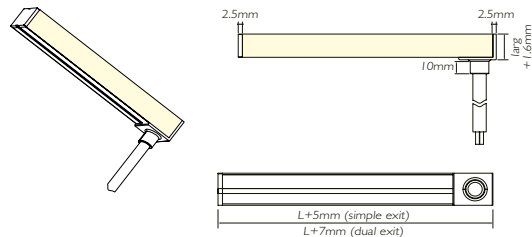

Fixing Accessories / Accessoires Fixation





A4401 Flat Aluminum rail
1000mm



A4401 Aluminium clip
25mm




A4401 High Aluminum rail
1000mm



A4401 High Aluminum clip
25mm





A4401 Flat PC rail
1000mm



A4401 PC clip
25mm



A4401 Side Aluminum rail
1000mm



A4401 Side Aluminum clip
35mm



A4401 Moldable Groove
500mm (cannot be used upside down)

