


NEO TOP SAUNA

Flexible uniform LED light line, top bend, for Sauna | 110°
Ligne lumineuse LED, flexible verticalement, pour Sauna | 110°
A4443

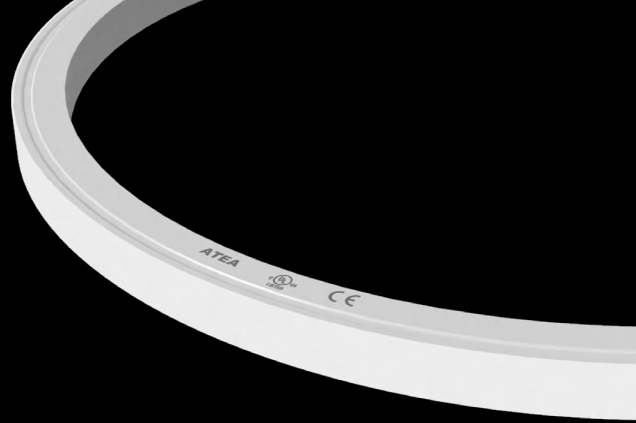

Temperature de couleur CCT
1600K - 2200K - 2700K - 3000K - 4000K - 6500K | RGB

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K) 410 lm | (@RGB) 158 lm & 115°

Puissance Power
7.2w/m (RGB) - 5w/m (W)


Coupe Cutting Unit
50 mm

Dimensions & courbure mini Dimensions & min. bending
(@W) 15000 - (@RGB) 5000 x 13 x 12 mm | R > 60 mm

Indices de protection & normes Standards
IP67 | IK08 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 40°C / + 110°C

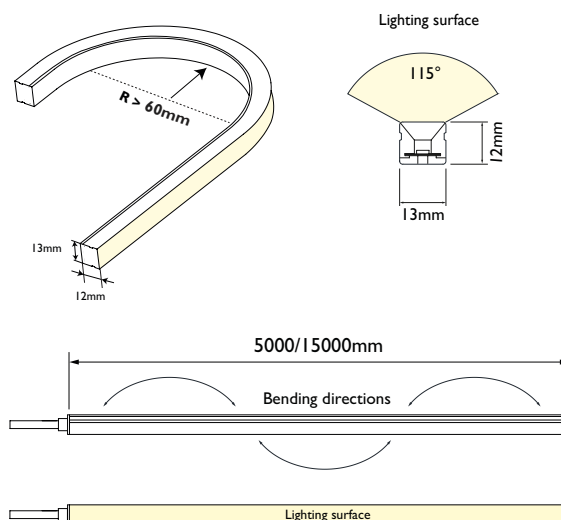

A4443.5.930.IP67.DALI

Power
5w/m (W)
7.2w/m (RGB)

5
7

CCT & luminous flux

1600K 180 lm/m
2200K 355 lm/m
2700K 370 lm/m
3000K 390 lm/m
4000K 410 lm/m
6500K 460 lm/m

916
922
927
930
940
965

RGB 158 lm/m

RGB

IP Rating
IP67


IP67

Dimming
No dimming
Dali
Dmx
Dimming 0/1 - 10VDC
Casambi


HF
DALI
DMX
DI0
CSB

Cable Entry / Entrée de câble


IP67 No dark Endcap - Axis outlet

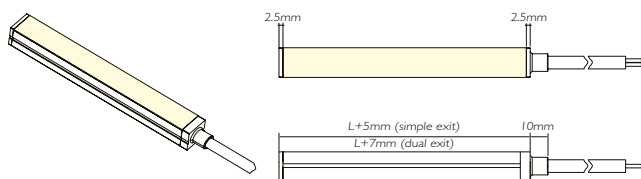


IP67 No dark Endcap - Bottom outlet

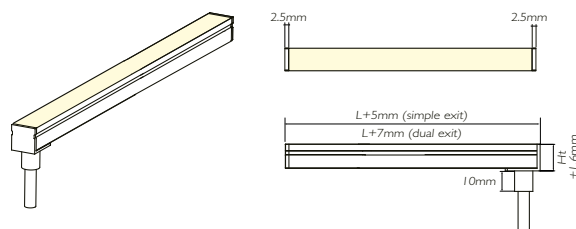

IP67 No dark Endcap - Right side outlet

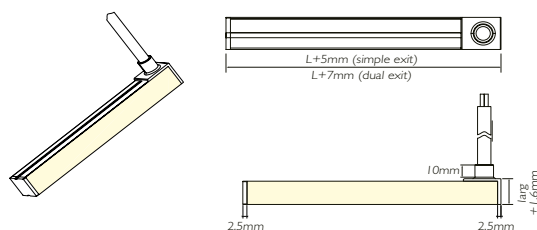


IP67 No dark Endcap - Left side outlet

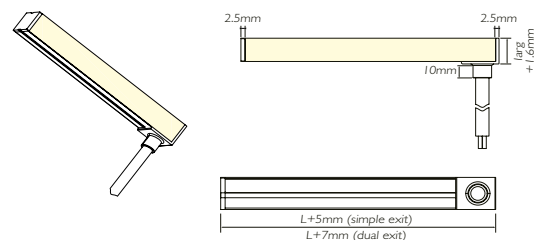

Fixing Accessories / Accessoires Fixation




A440I Flat Aluminum rail
1000mm



A440I Aluminium clip
25mm





A440I High Aluminum rail
1000mm



A440I High Aluminum clip
25mm



A440I Side Aluminum rail
1000mm



A440I Side Aluminum clip
35mm



A440I Moldable Groove
500mm (cannot be used upside down)

