

NEO TOP XL 30

Wide flexible uniform LED light line, top bend, 30mm
Large ligne lumineuse LED, flexible verticalement, 30mm

A4453



Temperature de couleur CCT

2100K - 2400K - 3000K - 3500K - 4000K - 5000K - 6500K
| DW 2100/6500K | Color (R/G/B/Y/P) | RGB | RGBW

Precision de couleur & IRC Color consistency & CRI

OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle

(@4000K) 1280 lm | (@DW) 1230 lm | (@RGB) 540 lm (@RGBW) 720 lm & 120°

Puissance Power

20w/m

Coupe Cutting Pace

50 mm (W / Color) | 41.67 mm (DW / RGB / RGBW)

Dimensions & courbure mini Dimensions & min. bending g radius

(@DW & RGB & RGBW) 5000 | (W & Color) 9000 x 30 x 20 mm | > 150 mm

Indices de protection & normes Standards


IP67 | IK08 | UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class

24 Vdc | class III

Température d'utilisation Ambient temperature

- 25°C / + 45°C

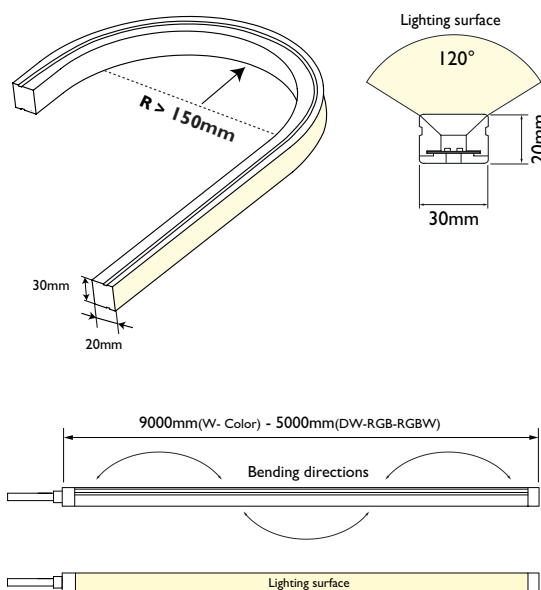

A4453.20.930.IP67.DALI6

Power

20w/m

20

CCT & luminous flux

20w/m

2100K	1020 lm/m	921
2400K	1040 lm/m	924
2700K	1210 lm/m	927
3000K	1220 lm/m	930
3500K	1130 lm/m	935
4000K	1280 lm/m	94
5000K	130 lm/m	950
6500K	1180 lm/m	965
DW 2100/6500K	1230 lm/m	DW
Red	530 lm/m	RED
Green	1240 lm/m	GREEN
Blue	270 lm/m	BLUE
Yellow	520 lm/m	YELLOW
Pink	520 lm/m	PINK
RGB	540 lm/m	RGB
RGBW(4000K)	720 lm/m	RGBW

IP Rating

IP67

IP67


Dimming

No dimming
Dali DT8 (DW)
Dali DT6
Dmx
Dimming 0/1 - 10VDC
Casambi


HF
DALI8
DALI6
DMX
DI0
CSB

Cable Entry / Entrée de câble

IP67 Glued cap - Axis outlet

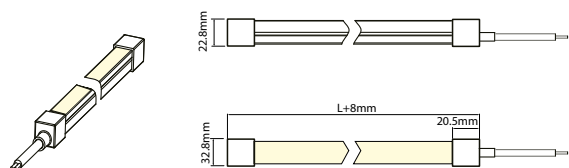


IP67 Glued cap - Bottom outlet

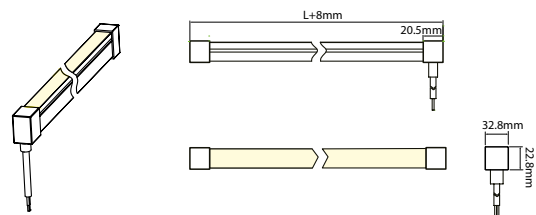

Fixing Accessories / Accessoires Fixation



A4453 Aluminum rail | 000mm



A4453 Aluminum clip
20mm



A4453 Suspension Kit
(use with the profile)