

NEO TOP XL 50

Large ligne lumineuse LED, flexible verticalement
Wide flexible uniform LED light line, top bend, 50mm
A4455



Temperature de couleur CCT
2700K - 3000K - 4000K - 5000K - 6000K
| DW 2700K - 6000K | Color (R / G / B / Y / P) | RGB | RGBW

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K) 869 lm | (@DW) 794 lm | (@RGB) 516 lm | (@RGBW) 524 lm & 120°

Puissance Power
15w/m


Coupe Cutting Unit
50 mm (White & Color) | 41.67 mm (DW & RGB & RGBW)

Dimensions & courbure mini Dimensions & min. bending
(White & Color) 12000 | (DW & RGB & RGBW) 5000 x 50 x 25 mm | R > 250 mm

Indices de protection & normes Standards
IP67 | IK08 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 25°C / + 45°C

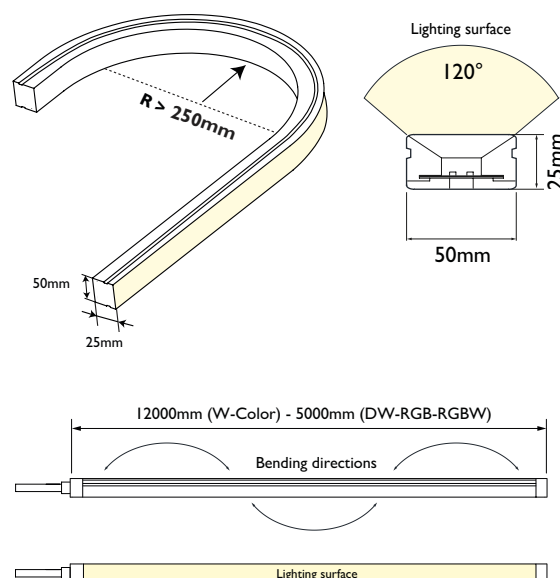

A4455.15.930.IP67.DALI6

Power
15w/m

CCT & luminous flux

	15w/m	
2700K	792 lm/m	927
3000K	808 lm/m	930
4000K	896 lm/m	940
5000K	858 lm/m	950
6000K	826 lm/m	965
DW 2100/6000K	794 lm/m	DW
Red	365 lm/m	RED
Green	974 lm/m	GREEN
Blue	216 lm/m	BLUE
Yellow	292 lm/m	YELLOW
Pink	762 lm/m	PINK
RGB	516 lm/m	RGB
RGBW(4000K)	524 lm/m	RGBW

IP Rating
IP67


Dimming
No dimming
Dali DT8 (DW)
Dali DT6
Dmx
Dimming 0/1 - 10VDC
Casambi

IP67

HF
DALI8
DALI6
DMX
D10
CSB

Cable Entry / Entrée de cable



IP67 Glued cap - Axis outlet

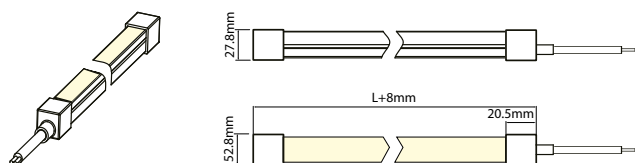

Fixing Accessories / Accessoires Fixation



A4455 Aluminum rail
1000mm

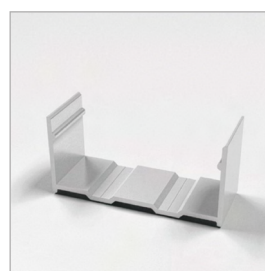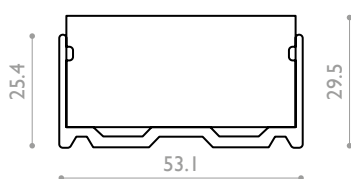

A4455 Aluminum clip
20mm



A4453 Suspension Kit
(use with the profile)