

NEO TOP MINI LOUVER

Flexible uniform LED light line with low glare microblouver
Ligne lumineuse LED, anti éblouissement microlouvre, 10mm

A4461



Temperature de couleur CCT
2200K - 2400K - 2700K - 3000K - 3500K - 4000K - 5000K - 6000K
DW(2700-6000K) - RGB

Precision de couleur & IRC Color consistency & CRI
OneBinOnly & CRI 90+

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@RGB) 90 lm | (@DW) 270 lm | (@4000K) 200 lm & 110°x35°

Puissance Power
12w/m


Coupe Cutting Pace
Free cut (W) | 35.7 mm (DW/RGB)

Dimensions & courbure mini Dimensions & min. bending g radius
5000 x 10 x 10 mm | R >50mm

Indices de protection & normes Standards
IP54 | IK06 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 20°C / + 45°C

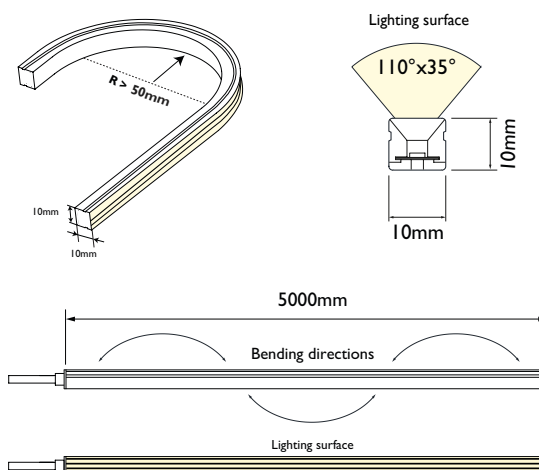

Power
12w/m

CCT & luminous flux

2200K	164 lm/m
2400K	170 lm/m
2700K	180 lm/m
3000K	184 lm/m
3500K	194 lm/m
4000K	200 lm/m
5000K	196 lm/m
6000K	196 lm/m

2700/6000K	270 lm/m
RGB	90 lm/m

IP Rating
IP54

Dimming

No dimming
Dali DT8 (DW)
Dali DT6
Dmx
Dimming 0/1 - 10VDC
Casambi

12

922
924
927
930
935
940
950
960


DW
RGB

IP54

HF
DALI8
DALI6
DMX
D10
CSB


A4461.12.930.IP54.DALI6

LOUVER GRID 110x35°




Entry cable / Entrée de cable


IP67 Glued Endcap - Axis outlet

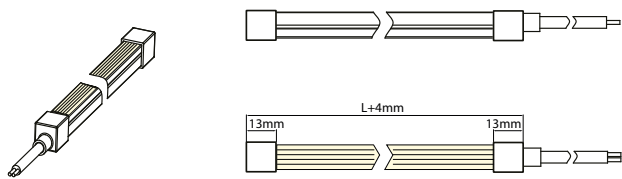


IP67 Glued Endcap - Bottom outlet

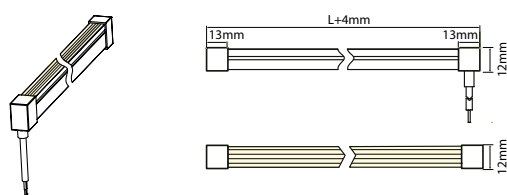

IP67 Glued Endcap - Right side outlet

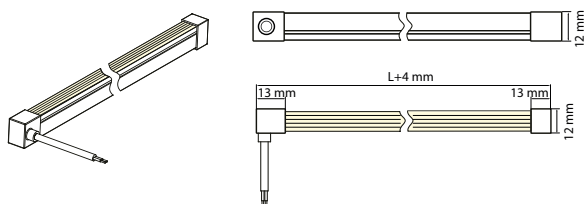


IP67 Glued Endcap - Left side outlet

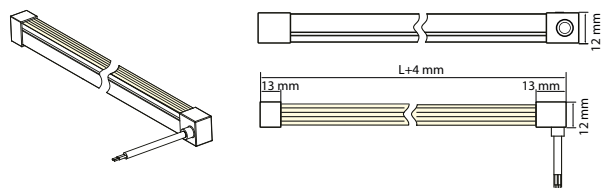



Fixing Accessories / Accessoires Fixation



A446I Stainless steel Clip



A446I Aluminum Rail
1000mm

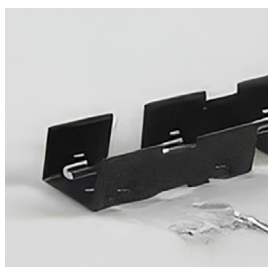

A446I Moldable Groove
1000mm

