


NEO SIDE SLIM6 RGBW

Flexible Uniform LED Light Line, side bend, 6mm
Ligne LED flexible latéralement largeur 6 mm
A4505

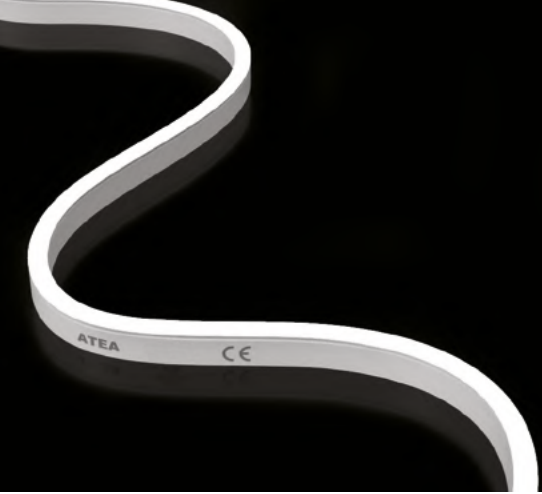

Temperature de couleur **CCT**
RGBW

Puissance lumineuse **Luminous output**
220 - 415 lm/m

Puissance **Power**
5 - 10 w/m




Coupe **Cutting pace**
50mm

Dimensions & Rayon courbure mini **Dimensions & min. bending radius**
5000 x 06 x 12mm | >30mm

Indices de protection & normes **Standards**
IP67 | IK06 | LM80 | CE
Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation **Input voltage & Class**
24Vdc | class III

Température d'utilisation **Ambient temperature**
- 20°C / + 40°C

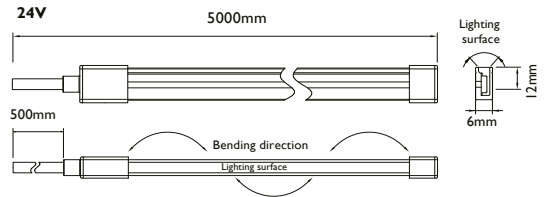

A4505.RGBW.IP67

CCT & luminous flux

5w/m 10w/m

RGBW

RGBW 220 lm/m 415 lm/m

IP Rating
IP 67

IP67



A4505.TRP
Plastic Rail
1000mm




A4505.CLP
Plastic Clip
25mm



A4505.TRA
Aluminium Rail
1000mm



A4505.CLA
Aluminium Clip
25mm



Axis output cable
500mm



A4505.TRH
Aluminium Rail High
1000mm



A4505.CLH
Aluminium Clip High
25mm



A4505.MGS
Moldable groove
1000mm (2x500mm)
Cannot be used
upside down