


NEO SIDE PIXEL

Flexible uniform LED light line, side bend, pixel
Ligne lumineuse LED, flexible latéralement, Digital
A4519

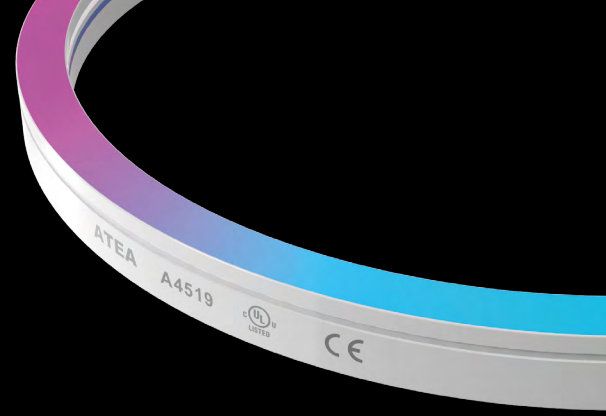

Temperature de couleur CCT
RGBX | RGBWX (W = 2200K | 2700K | 3000K | 4000K)

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@RGB) 230 lm | (@RGB+4000K) 110 lm | 115°

Puissance Power
(RGB) 17.8w/m | (RGBW) 14.5w/m

Coupe Cutting Unit
83.3 mm


Protocol & adresses Protocol & adresses
(RGB) UCS5603A | (RGBW) UCS7604 & 12 pixels/m

Dimensions & courbure mini Dimensions & min. bending
5000 x 12 x 17 mm | R > 80 mm

Indices de protection & normes Standards
IP67 | K08 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24Vdc | class III

Température d'utilisation Ambient temperature
- 40°C / + 50°C

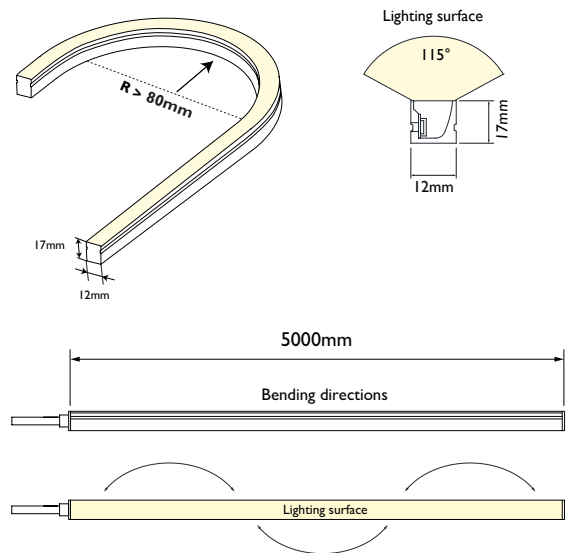

A4519.18.RGBWX.940.IP67.SPI

Power

17.8w/m (RGB)
14.5w/m (RGBW)

18
15

CCT & luminous flux

RGBX 297 lm/m
RGBW(4000K) 175 lm/m

RGBX
RGBWX

IP Rating

IP67

IP67


Dimming

SPI


SPI

Cable Entry / Entrée de câble


IP67 No dark Endcap - Axis outlet (RGB + RGBW)

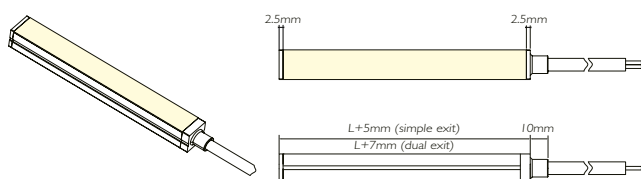


IP67 No dark Endcap - Bottom outlet (RGB + RGBW)

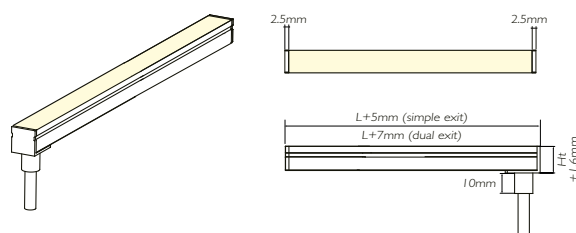

IP67 No dark Endcap - Right side outlet (RGB)

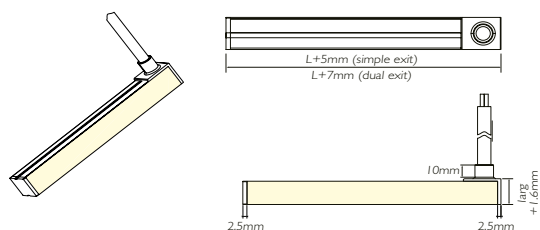



IP67 No dark Endcap - Left side outlet (RGB + RGBW)

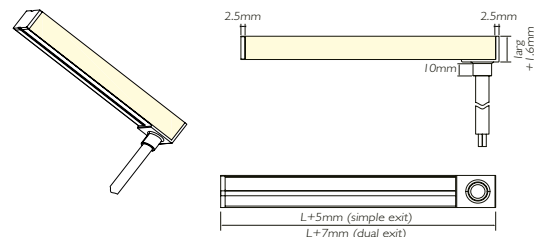


Fixing Accessories / Accessoires Fixation





A450I Flat Aluminum rail
1000mm



A450I Aluminium clip
25mm





A450I High Aluminum rail
1000mm



A450I High Aluminum clip
25mm




A450I Flat PC rail
1000mm



A450I PC clip
25mm



A450I Side Aluminum rail
1000mm



A450I Side Aluminum clip
35mm



A450I Moldable Groove
500mm (cannot be used upside down)

