

NEO SIDE MINI ULTRA EFFICIENCY

Flexible uniform LED light line, ultra efficiency, side bend
Ligne lumineuse LED de haut rendement, flexible latéralement
A453I



Temperature de couleur CCT
(@13w) 2700K - 3000K - 4000K
(@7.2w) 2300K - 2700K - 3000K - 3500K - 4000K

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K & 7.2w) 370 lm - (@4000K & 13w) 730 lm & 115°

Puissance Power
7.2w/m | 13w/m


Coupe Cutting Unit
5.95 mm

Dimensions & courbure mini Dimensions & min. bending
10000 x 10 x 10 mm | 5000 x 10 x 10 mm | R > 60 mm

Indices de protection & normes Standards
IP67 | IK08 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 25°C / + 55°C

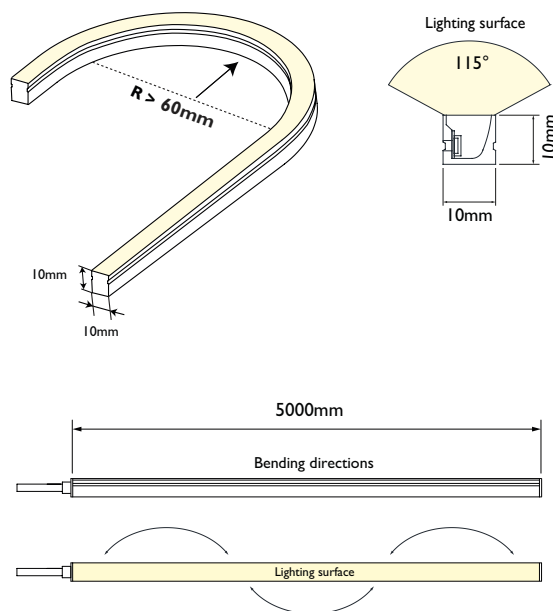

A453I.13.930.IP67.DALI

Power

13w/m
7.2w/m

13
7

CCT & luminous flux

	7.2w/m	13w/m	
2300K	320 lm/m		923
2700K	350 lm/m	695 lm/m	927
3000K	350 lm/m	740 lm/m	930
3500K	370 lm/m		930
4000K	370 lm/m	730 lm/m	940

IP Rating

IP67

IP67

Dimming

No dimming

Dali

Dmx


Dimming 0/1 - 10VDC

Casambi


HF
DALI
DMX
DI0
CSB

Cable Entry / Entrée de cable


IP67 No Dark Endcap - Axis outlet

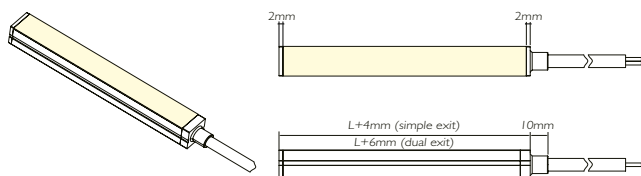


IP67 No Dark Endcap - Bottom outlet

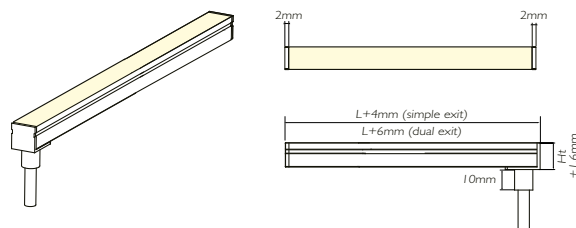



IP67 No Dark Endcap - Left side outlet

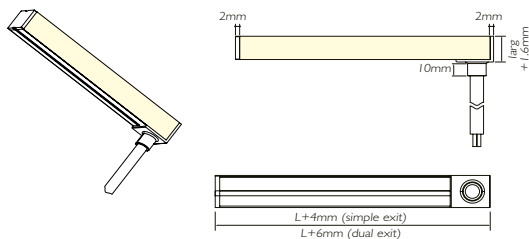


Fixing Accessories / Accessoires Fixation

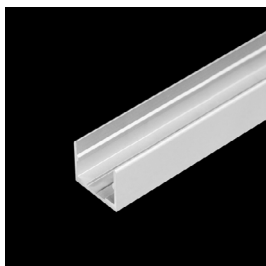

A4431 Aluminum rail
1000mm

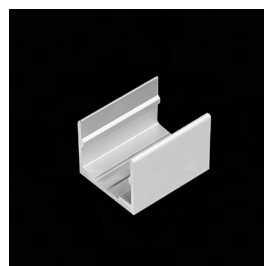

A4431 Aluminum clip
20mm

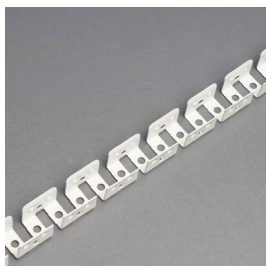

A4431 Moldable groove White
(cannot be upside down)
500mm

