


NEO SIDE ULTRA EFFICIENCY

Flexible uniform LED light line, ultra efficiency, side bend
Ligne lumineuse LED de haut rendement, flexible latéralement
A4532

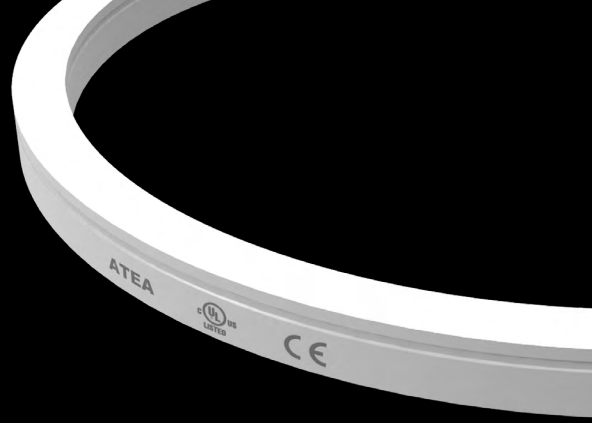

Temperature de couleur CCT
2200K - 2700K - 3000K - 4000K - DW (2200-6000K)

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K-10W) 795 lm | (@4000K-15W) 1000 lm | (@DW) 880 lm & 115°

Puissance Power
10 & 15w/m (W) | 14w/m (DW)


Coupe Cutting Unit
(@W) 6.25 mm | (@DW) 4.29mm

Dimensions & courbure mini Dimensions & min. bending
5000 (@W-10W) / 10000 (@W-15W & DW) x 12 X 17 mm | R > 60 mm

Indices de protection & normes Standards
IP67 | IK08 | Flame resistant - UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24Vdc | class III

Température d'utilisation Ambient temperature
- 25°C / + 50°C

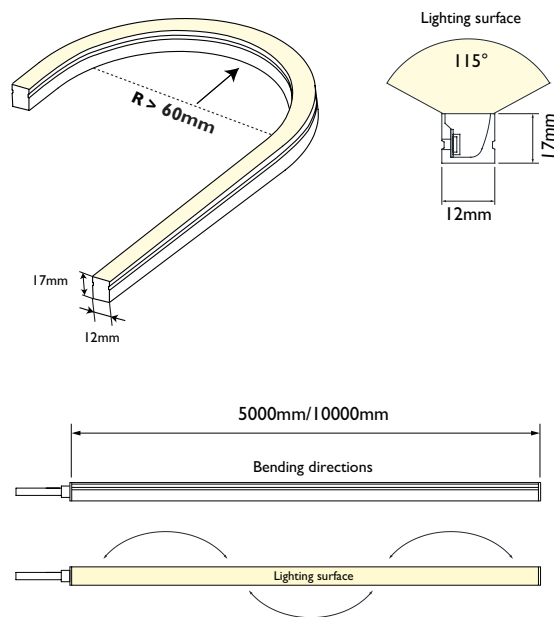

A4532.10.930.IP67.DALI6

Power

15w/m	15
14w/m	14
10w/m	10

CCT & luminous flux

	10 w/m	15 w/m	
2200K	605 lm/m	840 lm/m	922
2700K	730 lm/m	1030 lm/m	927
3000K	775 lm/m	1033 lm/m	930
4000K	795 lm/m	1000 lm/m	940
		14 w/m	
DW (2200-6000K)	880 lm/m		DW

IP Rating


IP67	IP67
------	------

Dimming


No dimming	HF
Dali DT8 (DW)	DALI8
Dali DT6	DALI6
Dmx	DMX
Dimming 0/1 - 10VDC	D10
Casambi	CSB

Cable Entry / Entrée de câble


IP67 No dark Endcap - Axis outlet

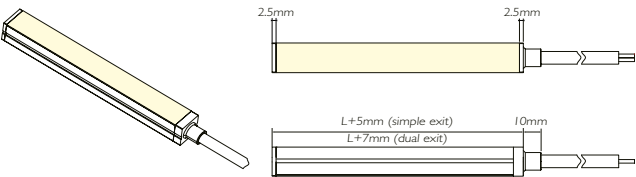

IP67 No dark Endcap - Bottom outlet

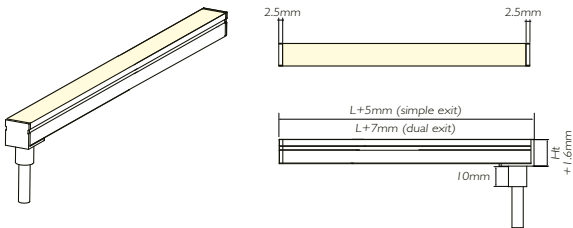



IP67 No dark Endcap - Left side outlet

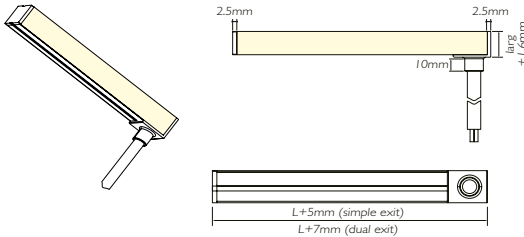


Fixing Accessories / Accessoires Fixation





A450I Flat Aluminum rail
1000mm



A450I Aluminium clip
25mm





A450I High Aluminum rail
1000mm



A450I High Aluminum clip
25mm





A450I Flat PC rail
1000mm



A450I PC clip
25mm



A450I Side Aluminum rail
1000mm



A450I Side Aluminum clip
35mm



A450I Moldable Groove
500mm (cannot be used upside down)

