



NEO SIDE SLIM6 MINI CUT

Flexible Uniform Led Light Line, side bend, 6mm
Ligne lumineuse LED, flexible latéralement, 6mm
A4536

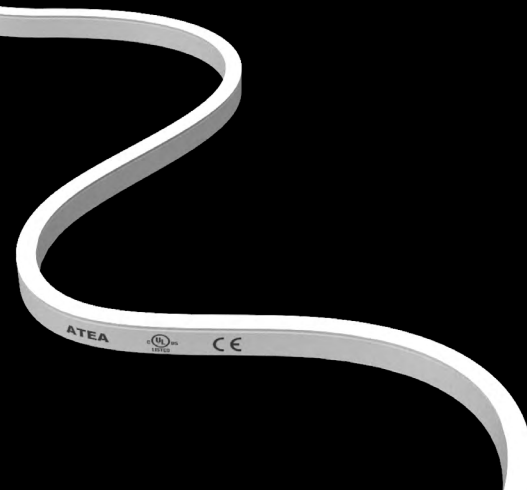


Temperature de couleur CCT 1800K 2400K 2700K 3000K 4000K 5000K 6000K	
Precision de couleur & IRC Color consistency & CRI OneBinOnly >90	
Puissance lumineuse & Angle faisceau Luminous output & Beam angle (@4000K) 363 lm & 115°	
Puissance Power 10w/m	
Coupe Cutting Unit 8.33mm	
Dimensions & courbure mini Dimensions & min. bending 5000 x 06 x 12 mm R > 100 mm	
Indices de protection & normes Standards IP67 IK08 Flame resistant - UV resistant - Solvent resistant - Saltwater resistant	
Tension alimentation & Classe isolation Input voltage & Class 24 Vdc class III	
Température d'utilisation Ambient temperature - 25°C / + 45°C	

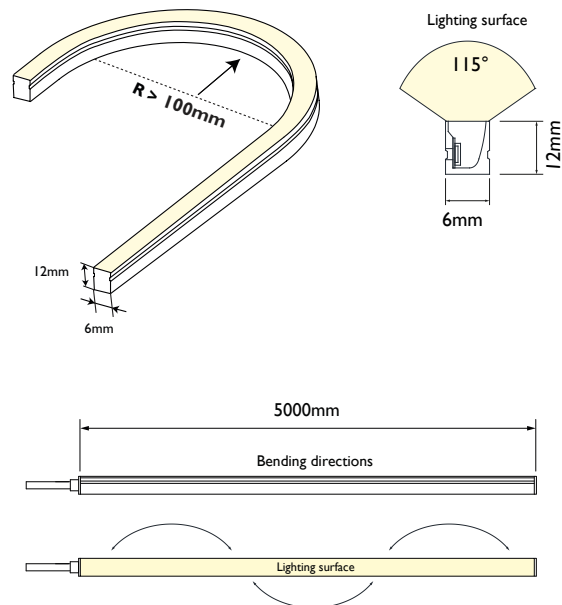

A4536.10.930.IP67.DALI			
Power 10w/m	10		
CCT & luminous flux			
1800K	290 lm/m	918	
2400K	325 lm/m	924	
2700K	346 lm/m	927	
3000K	346 lm/m	930	
4000K	363 lm/m	940	
5000K	363 lm/m	950	
6000K	363 lm/m	960	
IP Rating IP67	IP67		
Dimming No dimming Dali Dmx Dimming I to 10VDC Casambi	HF DALI DMX DI0 CSB		

Cable Entry / Entrée de cable



IP67 Glued Endcap - Axis outlet

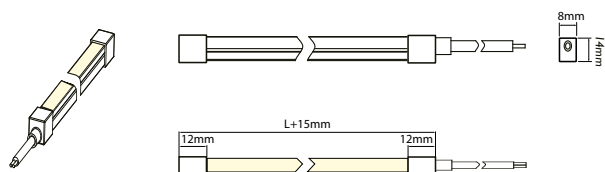

Fixing Accessories / Accessoires Fixation




A4506 Aluminum rail
1000mm




A4506 Aluminum clip
20mm




A4506 High Aluminum rail
1000mm



A4506 Moldable Groove
500mm (cannot be upside down)



A4506 PC rail
1000mm



A4506 PC clip
20mm