

NEO SIDE XL 30

Wide flexible uniform LED light line, side bend, 30mm
Large ligne lumineuse LED, flexible latéralement

A4553



Temperature de couleur CCT
2700K - 3000K - 4000K - 6500K | DW 2700K/6500K
Color (R / G / B / Y / P) | R/G/B | RGB | RGBV

Precision de couleur & IRC Color consistency & CRI
OneBinOnly | >90

Puissance lumineuse & Angle faisceau Luminous output & Beam angle
(@4000K) 743 lm | (@DW) 650 lm | (@RGB) 375 lm | (@RGBW) 542 lm & 120°

Puissance Power
15w/m


Coupe Cutting Unit
50mm (W & Color) | 62,5mm (DW) | 83.3mm (RGB & RGBW)

Dimensions & courbure mini Dimensions & min. bending g radius
(White & Color) | 2000 | (DW & RGB & RGBW) 5000 x 50 x 25 mm | R > 250 mm

Indices de protection & normes Standards
IP67 | IK08 | UV resistant - Solvent resistant - Saltwater resistant

Tension alimentation & Classe isolation Input voltage & Class
24 Vdc | class III

Température d'utilisation Ambient temperature
- 25°C | + 45°C

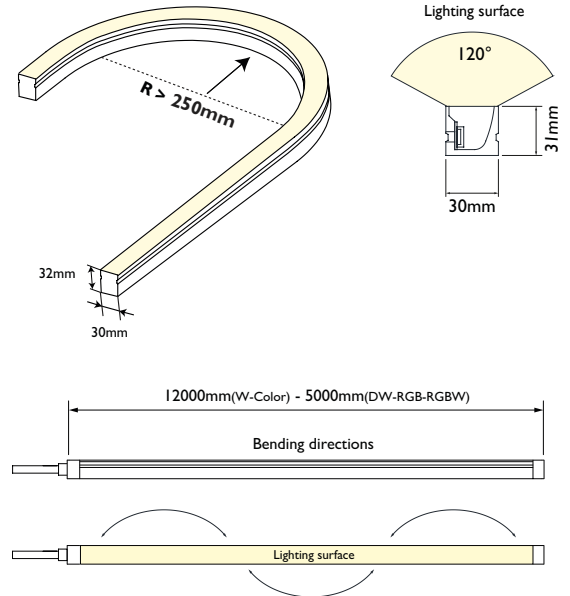

A4553.15.930.IP67.DALI6

Power
15w/m

15

CCT & luminous flux

	15w/m	
2700K	645 lm/m	927
3000K	660 lm/m	930
4000K	743 lm/m	940
6500K	670 lm/m	965
DW 2700/6500K	650 lm/m	DW
Red	284 lm/m	RED
Green	632 lm/m	GREEN
Blue	149 lm/m	BLUE
Yellow	195 lm/m	YELLOW
Pink	581 lm/m	PINK
RGB	375 lm/m	RGB
RGBW (4000K)	542 lm/m	RGBW

IP Rating
IP67

IP67


Dimming

No dimming
Dali DT8 (DW)
Dali DT6
Dmx
Dimming 0/1 - 10VDC
Casambi


HF
DALI8
DALI6
DMX
DI0
CSB

Cable Entry / Entrée de cable


IP67 Glued Endcap - Axis outlet

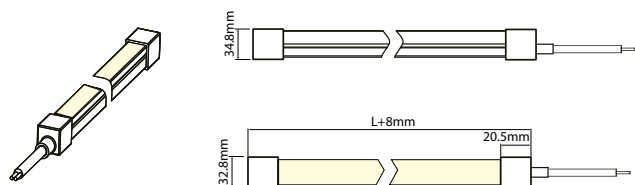

Fixing Accessories / Accessoires Fixation

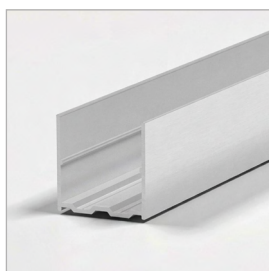

A4553 Aluminum rail
1000mm



A4553 Aluminum clip
20mm



A4553 Suspension Kit
(use with the profile)